

+

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 865.4477

First Named Inventor or Application Identifier

MAKOTO MISAKA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages **70**3. ☒ Drawing(s) (35 USC 113) Total Sheets **16**4. ☒ Oath or Declaration Total Pages **1**

- a. ☐ Newly executed (original or copy)
- b. ☒ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label**05514**
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	61-20 =	41	X \$ 18.00 =	\$ 738.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	5-3 =	2	X \$ 78.00 =	\$ 156.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
			Total of above Calculations =		\$1844.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL = \$1844.00				

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1844.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

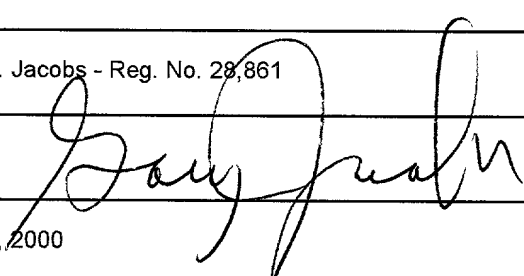SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Gary M. Jacobs - Reg. No. 28,861
SIGNATURE	
DATE	May 23, 2000

GMJ\cmv

00000000000000000000

[illegible]

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a zoom lens suited for a photographic camera for film, a video camera, a digital camera and a still video (SV) camera of the electronic recording type, etc., and more particularly to a zoom lens of the so-called negative lead type in which a negative lens unit leads.

Description of Related Art

Heretofore, there has been widely used, as a wide-angle zoom lens, a zoom lens of the so-called negative lead type in which a lens unit of negative refractive power leads, because, in the zoom lens of the negative lead type, the widening of an angle of view is relatively easy.

In the meanwhile, for example, in a zoom lens of the negative lead type having four lens units, at the telephoto end, the first lens unit and the second lens unit constitute a positive group as a whole and the third lens unit and the fourth lens unit constitute a negative group as a whole, so that the entire lens system can be formed into the so-called telephoto type. Therefore, the zoom lens of the negative lead type has such an advantage that it is easy to lengthen the focal length at the telephoto end. This is of course not limited to the four-unit zoom lens.

Among a great number of conventional zoom lenses

of the negative lead type, four-unit zoom lenses of the negative lead type have been disclosed in, for example, Japanese Laid-Open Patent Applications No. Sho 60-87312, No. Hei 2-201310, No. Hei 5-241073, No. Hei 4-235515, No. Hei 4-163415, No. Hei 5-313065, No. Sho 58-95315, No. Hei 6-82698, No. Hei 5-19170, No. Hei 7-287168, etc. In these zoom lenses, the variation of magnification is effected by moving at least two lens units of the four lens units.

In the above-mentioned zoom lenses, in order to realize a wide angle of view while retaining a predetermined variable magnification ratio, a negative lens located on the most object side is made of a glass material having a high refractive index. Most of such glass materials are expensive and are high in specific gravity, causing a considerably large problem in respect of the attainment of low cost and light weight of the zoom lens.

BRIEF SUMMARY OF THE INVENTION

It is an object of the invention to realize the low cost, light weight and small size of a zoom lens while retaining good optical performance thereof.

In view of the above object, in accordance with an aspect of the invention, there is provided a zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, a third

lens unit of negative refractive power, and a fourth lens unit of positive refractive power, wherein the first lens unit has a negative lens located on the most object side thereof, and the negative lens located on the most object side of the first lens unit satisfies the following conditions:

- (a) $35 < v_{11n} < 65$, and
- (b) when $35 < v_{11n} < 52$,
 $-0.013 v_{11n} + 2.19 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $52 < v_{11n} < 60$,
 $1.5 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $60 < v_{11n} < 65$,
 $1.5 < N_{11n} < -0.022 v_{11n} + 2.94$,

where v_{11n} is an Abbe number of a material of the negative lens located on the most object side of the first lens unit, and N_{11n} is a refractive index of the material of the negative lens located on the most object side of the first lens unit.

In the above zoom lens, the first lens unit has a second negative lens other than the negative lens located on the most object side thereof, and the second negative lens satisfies the following conditions:

- (c) $35 < v_{12n} < 65$, and
- (d) when $35 < v_{12n} < 52$,
 $-0.013 v_{12n} + 2.19 < N_{12n} < -0.005 v_{12n} + 1.92$,
when $52 < v_{12n} < 60$,
 $1.5 < N_{12n} < -0.005 v_{12n} + 1.92$,
when $60 < v_{12n} < 65$,

$$1.5 < N_{12n} < -0.022 \nu_{12n} + 2.94,$$

where ν_{12n} is an Abbe number of a material of the second negative lens of the first lens unit, and N_{12n} is a refractive index of the material of the second negative lens of the first lens unit.

The above zoom lens becomes, at a telephoto end, a telephoto type in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

In the above zoom lens, during variation of magnification from a wide-angle end to a telephoto end, the first lens unit moves with a locus convex toward the image side, the second lens unit moves toward the object side in such a way as to decrease a separation between the first lens unit and the second lens unit, the third lens unit moves toward the object side in such a way as to increase a separation between the second lens unit and the third lens unit, and the fourth lens unit moves toward the object side in such a way as to decrease a separation between the third lens unit and the fourth lens unit.

The above zoom lens satisfies the following condition:

$$0.9 < |f_1/f_w| < 1.8$$

where f_1 is a focal length of the first lens unit, and f_w is a focal length of the entire zoom lens in a wide-angle

end.

In the above zoom lens, the first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

In the above zoom lens, the second lens unit and the fourth lens unit move in unison with each other during variation of magnification.

The above zoom lens satisfies the following conditions:

$$0.65 < f_2/f_w < 1.3$$

$$1.2 < |f_3/f_w| < 3.4$$

where f_2 and f_3 are focal lengths of the second lens unit and the third lens unit, respectively, and f_w is a focal length of the entire zoom lens in a wide-angle end.

The above zoom lens consists of the first to fourth lens units, and satisfies the following condition:

$$2.1 < f_4/f_w < 8.5$$

where f_4 is a focal length of the fourth lens unit, and f_w is a focal length of the entire zoom lens in a wide-angle end.

In the above zoom lens, the second lens unit comprises two positive lenses and one negative lens.

In the above zoom lens, the third lens unit comprises a cemented lens composed of a negative lens and a positive lens.

In the above zoom lens, the fourth lens unit comprises a negative lens and a positive lens, and has at least one aspheric surface.

In the above zoom lens, the second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens.

In the above zoom lens, the fourth lens unit has a plastic aspheric lens.

In the above zoom lens, the second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens, the third lens unit comprises a negative lens and a positive lens, and the fourth lens unit comprises a negative lens and a positive lens, and has a plastic aspheric lens.

In accordance with another aspect of the invention, there is provided a zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, and a third lens unit, wherein all said first to third lens units move during variation of magnification, the first lens unit has a negative lens located on the most object side thereof, and the negative lens located on the most object side of the first lens unit satisfies the following conditions:

(a) $35 < v_{11n} < 65$, and

(b) when $35 < v_{11n} < 52$,

$-0.013 v_{11n} + 2.19 < N_{11n} < -0.005 v_{11n} + 1.92$,

when $52 < v_{11n} < 60$,

$$1.5 < N_{11n} < -0.005 v_{11n} + 1.92,$$

$$\text{when } 60 < v_{11n} < 65,$$

$$1.5 < N_{11n} < -0.022 v_{11n} + 2.94,$$

where v_{11n} is an Abbe number of a material of the negative lens located on the most object side of the first lens unit, and N_{11n} is a refractive index of the material of the negative lens located on the most object side of the first lens unit.

In the above zoom lens, the third lens unit has a negative refractive power.

In accordance with a further aspect of the invention, there is provided a zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power and a second lens unit of positive refractive power, wherein the following conditions are satisfied:

$$1.1 < |f_1/f_w| < 1.4$$

$$0.8 < |f_2/f_w| < 1.1$$

where f_1 and f_2 are focal lengths of the first lens unit and the second lens unit, respectively, and f_w is a focal length of the entire zoom lens in a wide-angle end.

In the above zoom lens, the second lens unit has a cemented lens composed of a negative lens and a positive lens, and the following condition is satisfied:

$$20 < v_{2p} - v_{2n}$$

where v_{2p} is an Abbe number of a material of the positive lens of the cemented lens of the second lens unit, and v_{2n} is an Abbe number of a material of the negative lens

of the cemented lens of the second lens unit.

In accordance with a further aspect of the invention, there is provided a zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, and a third lens unit of negative refractive power, wherein the following conditions are satisfied:

$$1.1 < |f1/fw| < 1.4$$

$$0.8 < |f2/fw| < 1.1$$

where f1 and f2 are focal lengths of the first lens unit and the second lens unit, respectively, and fw is a focal length of the entire zoom lens in a wide-angle end.

In the above zoom lens, a stop is disposed adjacent to the third lens unit, the stop moving in unison with the third lens unit.

In the above zoom lens, the stop is disposed on the object side of the third lens unit.

In the above zoom lens, the third lens unit comprises one positive lens and one negative lens, and the following condition is satisfied:

$$1.5 < |f3/fw| < 3.0$$

where f3 is a focal length of the third lens unit.

In the above zoom lens, the third lens unit has a cemented lens composed of a negative lens and a positive lens, and the following conditions are satisfied:

$$4.0 < v3n - v3p < 12.0$$

$$0.05 < N_{3p} - N_{3n} < 0.20$$

where v_{3n} is an Abbe number of a material of the negative lens of the cemented lens of the third lens unit, v_{3p} is an Abbe number of a material of the positive lens of the cemented lens of the third lens unit, N_{3p} is a refractive index of the material of the positive lens of the cemented lens of the third lens unit, and N_{3n} is a refractive index of the material of the negative lens of the cemented lens of the third lens unit.

In accordance with a further aspect of the invention, there is provided a zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, a third lens unit of negative refractive power, and a fourth lens unit of positive refractive power, wherein the following conditions are satisfied:

$$1.1 < |f_1/f_w| < 1.4$$

$$0.8 < |f_2/f_w| < 1.1$$

where f_1 and f_2 are focal lengths of the first lens unit and the second lens unit, respectively, and f_w is a focal length of the entire zoom lens in a wide-angle end.

The above zoom lens consists of the first to fourth lens units, the fourth lens unit comprises one positive lens and one negative lens, and the following condition is satisfied:

$$2.5 < |f_4/f_w| < 8.0$$

where f_4 is a focal length of the fourth lens unit.

In the above zoom lens, the fourth lens unit has at least one aspheric surface.

In accordance with a further aspect of the invention, there is provided an image pickup apparatus comprising the above zoom lens, a photosensitive member, and means for supporting the zoom lens and the photosensitive member.

In accordance with a further aspect of the invention, there is provided an image projection apparatus comprising the above zoom lens, a light source, and an image forming element, and arranged to project an image.

These and further objects and features of the invention will become apparent from the following detailed description of preferred embodiments thereof taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

Figs. 1A to 1C are lens sectional views in different focal length positions of a zoom lens according to a numerical example 1 of the invention.

Figs. 2A to 2D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 1.

Figs. 3A to 3D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 1.

Figs. 4A to 4D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 1.

Fig. 5 is a lens sectional view of a zoom lens according to a numerical example 2 of the invention.

Figs. 6A to 6D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 2.

Figs. 7A to 7D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 2.

Figs. 8A to 8D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 2.

Fig. 9 is a lens sectional view of a zoom lens according to a numerical example 3 of the invention.

Figs. 10A to 10D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 3.

Figs. 11A to 11D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 3.

Figs. 12A to 12D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 3.

Fig. 13 is a lens sectional view of a zoom lens

according to a numerical example 4 of the invention.

Figs. 14A to 14D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 4.

Figs. 15A to 15D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 4.

Figs. 16A to 16D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 4.

Fig. 17 is a lens sectional view of a zoom lens according to a numerical example 5 of the invention.

Figs. 18A to 18D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 5.

Figs. 19A to 19D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 5.

Figs. 20A to 20D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 5.

Fig. 21 is a lens sectional view of a zoom lens according to a numerical example 6 of the invention.

Figs. 22A to 22D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 6.

Figs. 23A to 23D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 6.

Figs. 24A to 24D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 6.

Fig. 25 is a lens sectional view of a zoom lens according to a numerical example 7 of the invention.

Figs. 26A to 26D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 7.

Figs. 27A to 27D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 7.

Figs. 28A to 28D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 7.

Fig. 29 is a schematic diagram showing a liquid crystal projector in which the zoom lens according to the invention is used.

Fig. 30 is a schematic diagram showing a camera in which the zoom lens according to the invention is used.

DETAILED DESCRIPTION OF THE INVENTION

Hereinafter, preferred embodiments of the

invention will be described in detail with reference to the drawings.

Figs. 1A to 1C are lens sectional views in the wide-angle end, the middle focal length position and the telephoto end, respectively, of a zoom lens according to a numerical example 1 of the invention. Figs. 2A to 2D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 1. Figs. 3A to 3D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 1. Figs. 4A to 4D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 1.

Fig. 5 is a lens sectional view in the wide-angle end of a zoom lens according to a numerical example 2 of the invention. Figs. 6A to 6D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 2. Figs. 7A to 7D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 2. Figs. 8A to 8D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 2.

Fig. 9 is a lens sectional view in the wide-

angle end of a zoom lens according to a numerical example 3 of the invention. Figs. 10A to 10D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 3. Figs. 11A to 11D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 3. Figs. 12A to 12D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 3.

Fig. 13 is a lens sectional view in the wide-angle end of a zoom lens according to a numerical example 4 of the invention. Figs. 14A to 14D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 4. Figs. 15A to 15D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 4. Figs. 16A to 16D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 4.

Fig. 17 is a lens sectional view in the wide-angle end of a zoom lens according to a numerical example 5 of the invention. Figs. 18A to 18D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical

example 5. Figs. 19A to 19D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 5. Figs. 20A to 20D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 5.

Fig. 21 is a lens sectional view in the wide-angle end of a zoom lens according to a numerical example 6 of the invention. Figs. 22A to 22D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 6. Figs. 23A to 23D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 6. Figs. 24A to 24D are aberration diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 6.

Fig. 25 is a lens sectional view in the wide-angle end of a zoom lens according to a numerical example 7 of the invention. Figs. 26A to 26D are aberration diagrams showing the various aberrations in the wide-angle end of the zoom lens according to the numerical example 7. Figs. 27A to 27D are aberration diagrams showing the various aberrations in the middle focal length position of the zoom lens according to the numerical example 7. Figs. 28A to 28D are aberration

diagrams showing the various aberrations in the telephoto end of the zoom lens according to the numerical example 7.

In each of the lens sectional views of Figs. 1A, 5, 9, 13, 17, 21 and 25, reference character L1 denotes a first lens unit of negative refractive power, reference character L2 denotes a second lens unit of positive refractive power, reference character L3 denotes a third lens unit of negative refractive power, reference character L4 denotes a fourth lens unit of positive refractive power, reference character SP denotes an aperture stop, reference character FC denotes a flare-cutting stop, and reference character IP denotes an image plane.

Arrows shown in the lens sectional views indicate the respective movement loci of the first lens unit L1 to the fourth lens unit L4 during the variation of magnification from the wide-angle end to the telephoto end. It is to be noted that the wide-angle end and the telephoto end mean zoom positions obtained when the lens unit for the variation of magnification is located at both ends of a mechanically movable range thereof on the optical axis.

In the embodiments of the invention, during the variation of magnification from the wide-angle end to the telephoto end, the first lens unit L1 is moved in an approximately-reciprocating manner with a locus convex toward the image side to compensate for the shift of an

image plane caused by the variation of magnification, and the second lens unit L2, the third lens unit L3 and the fourth lens unit L4 are moved toward the object side to effect the variation of magnification.

In this instance, the second lens unit L2 is moved in such a way as to decrease a separation between the first lens unit L1 and the second lens unit L2, the third lens unit L3 is moved in such a way as to increase a separation between the second lens unit L2 and the third lens unit L3, and the fourth lens unit L4 is moved in such a way as to decrease a separation between the third lens unit L3 and the fourth lens unit L4. Further, focusing is effected by moving the first lens unit L1.

As described above, the entire lens system is composed of four lens units, and the separation between the respective adjacent lens units is varied during the variation of magnification, so that a compact zoom lens having a wide angle of view and a high variable magnification ratio can be attained.

The zoom lens according to the invention has a basic construction as mentioned in the foregoing. In addition, the stop SP, which is disposed in the vicinity of the third lens unit L3, moves in unison with the third lens unit L3 during the variation of magnification. Further, the flare-cutting stop FC is disposed between the fourth lens unit L4 and the image plane IP to cut off unnecessary light rays appearing on the wide-angle side and in the middle angle of view, thereby improving the

image quality.

Next, characteristic features of the first embodiment and the second embodiment of the invention will be described.

(A) The zoom lens according to the first embodiment, while having the above-mentioned basic construction, satisfies the following conditions (1), (2a), (2b) and (2c), or satisfies the following conditions (1) to (3):

$$(a) \quad 35 < v_{1n} < 65, \quad \dots (1)$$

$$(b) \quad \text{when } 35 < v_{1n} < 52, \\ -0.013 v_{1n} + 2.19 < N_{1n} < -0.005 v_{1n} + 1.92, \quad \dots (2a)$$

$$\text{when } 52 < v_{1n} < 60, \\ 1.5 < N_{1n} < -0.005 v_{1n} + 1.92, \quad \dots (2b)$$

$$\text{when } 60 < v_{1n} < 65, \\ 1.5 < N_{1n} < -0.022 v_{1n} + 2.94, \quad \dots (2c)$$

$$(c) \quad 0.9 < |f_1/f_w| < 1.8 \quad \dots (3)$$

where v_{1n} is an Abbe number of a material of a negative lens included in the first lens unit, N_{1n} is a refractive index of the material of the negative lens included in the first lens unit, f_1 is a focal length of the first lens unit L_1 , and f_w is a focal length of the entire zoom lens in the wide-angle end.

In general, in a photographic lens for single-lens reflex cameras, the lens diameter of the first lens unit is large as compared with those of the other lens units. In particular, in a zoom lens of the so-called

negative lead type in which a negative lens unit leads, as in the zoom lens according to the invention, the edge thickness of a negative lens included in the first lens unit becomes large. Therefore, the volume of the negative lens occupies a large percentage of the sum in volume of all the lenses included in the entire zoom lens. Accordingly, the negative lens occupies a large percentage of the entire zoom lens also in weight.

In view of the above, the first embodiment of the invention provides conditions for appropriately setting a refractive index and Abbe number of a glass material of the negative lens included in the first lens unit and for appropriately setting the focal length of the first lens unit obtained when such a glass material is employed.

The condition (1) is one of conditions for appropriately setting an Abbe number of the material of the negative lens included in the first lens unit. If the upper limit of the condition (1) is exceeded, the material of the negative lens becomes a glass material of high specific gravity, such as phosphate crown glass or fluor crown glass. If the lower limit of the condition (1) is exceeded, it becomes difficult to correct negative lateral chromatic aberration at the wide-angle end.

The conditions (2a), (2b) and (2c) are provided for appropriately setting a refractive index and Abbe number of the material of the negative lens included in the first lens unit. If the upper limit of each of the

conditions (2a), (2b) and (2c) is exceeded, the material of the negative lens becomes a glass material of high specific gravity, such as lanthanum or dense phosphate crown glass. If the lower limit of each of the conditions (2a), (2b) and (2c) is exceeded, it becomes difficult to correct well negative lateral chromatic aberration and negative distortion simultaneously at the wide-angle end.

It should be noted that the above-mentioned negative lens included in the first lens unit may be a negative lens disposed on the most object side of the first lens unit, or may be a negative lens included in the first lens unit other than the negative lens disposed on the most object side of the first lens unit.

The condition (3) is provided for appropriately setting the focal length of the first lens unit in a case where the glass material defined according to the conditions (1), (2a), (2b) and (2c) is used for the negative lens included in the first lens unit. If the upper limit of the condition (3) is exceeded, it becomes difficult to secure a predetermined variable magnification ratio or to reduce the size of the diameter of a front lens member. If the lower limit of the condition (3) is exceeded, it becomes difficult to correct distortion, coma and curvature of field at the wide-angle end, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power

arrangement of the telephoto type at the telephoto end.

In the first embodiment, desirably, it is preferred that the conditions (1) to (3) are limited to the following ranges:

$$(a)' \quad 37 < v_{1n} < 65, \quad \dots(1)'$$

$$(b)' \quad \text{when } 35 < v_{1n} < 52, \\ -0.008 v_{1n} + 2.02 < N_{1n} < -0.005 v_{1n} + 1.90, \\ \dots(2a)'$$

$$\text{when } 52 < v_{1n} < 60, \\ -0.008 v_{1n} + 2.02 < N_{1n} < -0.005 v_{1n} + 1.92, \\ \dots(2b)'$$

$$\text{when } 60 < v_{1n} < 65, \\ 0.008 v_{1n} + 2.02 < N_{1n} < -0.022 v_{1n} + 2.94, \\ \dots(2c)'$$

$$(c)' \quad 1.15 < |f_1/f_w| < 1.45 \quad \dots(3)'$$

While the zoom lens according to the first embodiment is realized by satisfying the above-described conditions, in order to further attain the shortening of the total length of the zoom lens while maintaining good optical performance, it is desirable to satisfy at least one of the following conditions.

(a-1) The first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

As mentioned in the foregoing, the increase of

the lens diameter of a front lens member greatly affects an increase in cost. In order to suppress this increase, it is necessary to make small the angle which an off-axial ray of light having passed through the first lens unit makes with the optical axis, by causing a negative refractive power to concentrate on the most object side. In other words, if an off-axial ray of light advances along an optical path which makes a small angle with the optical axis when viewing the first lens unit from the stop, it can be said that the size of the first lens unit does not become large.

In view of the above principle, in the first embodiment, two negative lenses are disposed on the most object side of the negative first lens unit, thereby reducing the diameter of a front lens member.

Further, in order to decrease the various aberrations occurring in the first lens unit, the negative lens disposed on the most object side is made to be a negative lens of meniscus form having a convex surface facing the object side, thereby making it easy to correct distortion and coma at the wide-angle end, in particular. In addition, on the image side of the above two negative lenses, there is disposed a positive lens, thereby correcting spherical aberration at the telephoto end, in particular.

If, desirably, the first lens unit is made to comprise, in order from the object side to the image side, a negative lens of meniscus form having a convex

surface facing the object side, a negative lens both lens surfaces of which are concave, and a positive lens of meniscus form having a convex surface facing the object side, it becomes possible to easily attain the above advantageous effect.

(a-2) The second lens unit and the fourth lens unit move in unison with each other during the variation of magnification.

With the second lens unit and the fourth lens unit made to move in unison with each other during the variation of magnification, the structure of a lens barrel can be advantageously simplified.

(a-3) The following conditions are satisfied:

$$0.65 < f_2/f_w < 1.3 \quad \dots(4)$$

$$1.2 < |f_3/f_w| < 3.4 \quad \dots(5)$$

$$2.1 < f_4/f_w < 8.5 \quad \dots(6)$$

where f_2 , f_3 and f_4 are focal lengths of the second lens unit, the third lens unit and the fourth lens unit, respectively.

The condition (4) is provided for appropriately setting the focal length of the second lens unit. If the upper limit of the condition (4) is exceeded, it becomes difficult to secure a required variable magnification ratio, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end. If the lower limit of the condition (4) is exceeded, it becomes

difficult to correct spherical aberration at the telephoto end, in particular.

The condition (5) is provided for appropriately setting the focal length of the third lens unit. If the upper limit of the condition (5) is exceeded, it becomes difficult to set a composite refractive power of the third lens unit and the fourth lens unit at the telephoto end to a sufficient negative refractive power, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end. If the lower limit of the condition (5) is exceeded, it becomes difficult to correct, in particular, coma and distortion throughout the whole focal length range.

The condition (6) is provided for appropriately setting the focal length of the fourth lens unit. If the upper limit of the condition (6) is exceeded, it becomes difficult to correct spherical aberration, in particular, at the telephoto end. If the lower limit of the condition (6) is exceeded, it becomes difficult to correct negative distortion at the wide-angle end.

Desirably, it is preferred that the conditions (4) to (6) are limited to the following ranges:

$$0.84 < f_2/f_w < 1.1 \quad \dots(4)'$$

$$1.6 < |f_3/f_w| < 2.8 \quad \dots(5)'$$

$$2.8 < f_4/f_w < 7.1 \quad \dots(6)'$$

(a-4) The second lens unit comprises two positive lenses and one negative lens.

In the type of zoom lens according to the first embodiment, the second lens unit of positive refractive power is not only a main lens unit for the variation of magnification but also a lens unit which most greatly bears a positive refractive power of the entire zoom lens from the wide-angle end through the telephoto end, and, therefore, requires a relatively strong refractive power. For that purpose, it is necessary to dispose a plurality of positive lenses in the second lens unit. However, if the number of positive lenses is excessively increased, the on-axial thickness of the second lens unit increases, so that the distance between the stop and the first lens unit becomes large. As a result, not only the second lens unit but also the first lens unit tends to become large in size.

In view of this, in the first embodiment, the positive second lens unit is made to have such a simple construction that only two positive lens and one negative lens are disposed therein. In that construction, the one negative lens bears the role of correcting the various aberrations occurring in the two positive lenses, in particular, spherical aberration at the telephoto end.

(a-5) The third lens unit comprises a cemented lens composed of a negative lens and a positive lens.

With the third lens unit composed of a positive

lens and a negative lens which are the minimum unit necessary for correcting chromatic aberration, it becomes possible to easily attain good optical performance and compactness of the zoom lens. Further, with the positive lens and the negative lens cemented together, it is possible to heighten such an advantageous effect.

(a-6) The fourth lens unit comprises a negative lens and a positive lens, and has at least one aspheric surface.

With the fourth lens unit composed of a positive lens and a negative lens which are the minimum unit necessary for correcting chromatic aberration, it becomes possible to easily attain good optical performance and compactness of the zoom lens. Further, with an aspheric surface used in the fourth lens unit, it becomes easy to correct curvature of field and distortion at the wide-angle end and spherical aberration at the telephoto end.

Desirably, it is preferred that the aspheric surface of the fourth lens unit is formed such that a negative refractive power thereof becomes progressively stronger according to a distance away from the optical axis.

(a-7) The second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens.

With the cemented lens composed of a negative lens and a positive lens disposed in the second lens unit, it is possible to correct well longitudinal

chromatic aberration at the telephoto end, in particular.

(a-8) The fourth lens unit has a plastic aspheric lens.

With the aspheric surface applied to a plastic lens, it becomes easy to manufacture the aspheric lens.

(B) The zoom lens according to the second embodiment, while having the above-mentioned construction, is formed such that the first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens and a positive lens, the second lens unit comprises two positive lenses and one negative lens, and the stop is disposed in the vicinity of the third lens unit and is moved in unison with the third lens unit, and satisfies the following conditions (7) and (8):

$$1.1 < |f1/fw| < 1.4 \quad \dots(7)$$

$$0.8 < f2/fw < 1.1 \quad \dots(8)$$

where $f1$ and $f2$ are focal lengths of the first lens unit and the second lens unit, respectively, and fw is a focal length of the entire zoom lens in the wide-angle end.

In general, in the case of a zoom lens including a wide angle region, the diameter of a front lens member thereof is apt to become large. This causes an increase in weight of the zoom lens. In order to suppress this increase, it is necessary to make small the angle which an off-axial ray of light having passed through the first lens unit makes with the optical axis, by causing a

negative refractive power to concentrate on the most object side.

In other words, if an off-axial ray of light advances along an optical path which makes a small angle with the optical axis when viewing the first lens unit from the stop, it can be said that the size of the first lens unit does not become large.

In view of the above principle, in the second embodiment, two negative lenses are disposed on the most object side of the first lens unit of negative refractive power, thereby reducing the diameter of a front lens member.

Further, in order to decrease the various aberrations occurring in the first lens unit, the negative lens disposed on the most object side is made to be a negative lens of meniscus form having a convex surface facing the object side, thereby making it easy to correct distortion and coma at the wide-angle end, in particular. In addition, on the image side of the above two negative lenses, there is disposed a positive lens, thereby correcting spherical aberration at the telephoto end, in particular.

The condition (7) is provided for appropriately setting the focal length of the first lens unit. In general, in the case of a zoom lens of the so-called negative lead type in which a negative lens unit leads, as in the zoom lens according to the invention, if the refractive power of the negative first lens unit is

strengthened, an advantage arises in reducing the diameter of a front lens member.

However, if the refractive power of the negative first lens unit is excessively strengthened, it becomes difficult to correct distortion, coma and curvature of field at the wide-angle end, in particular. In addition, it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end.

The condition (7) is set in view of the above reason. If the upper limit of the condition (7) is exceeded, it becomes difficult to reduce the size of the entire zoom lens. If the lower limit of the condition (7) is exceeded, it becomes difficult to correct distortion, coma and curvature of field at the wide-angle end, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end.

If, desirably, the first lens unit is made to comprise, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens both lens surfaces of which are concave, and a positive lens of meniscus form having a convex surface facing the object side, it becomes possible to easily attain the above advantageous effect.

Further, according to the second embodiment, in order to attain the above-mentioned objective, the second lens unit of positive refractive power is made to have an appropriate lens construction. In the type of zoom lens according to the second embodiment, the second lens unit of positive refractive power is not only a main lens unit for the variation of magnification but also a lens unit which most greatly bears a positive refractive power of the entire zoom lens from the wide-angle end through the telephoto end, and, therefore, requires a relatively strong refractive power.

For that purpose, it is necessary to dispose a plurality of positive lenses in the second lens unit. However, if the number of positive lenses is excessively increased, the on-axial thickness of the second lens unit increases, so that the distance between the stop and the first lens unit becomes large. As a result, not only the second lens unit but also the first lens unit tends to become large in size.

In view of this, in the second embodiment, the second lens unit of positive refractive power is made to have such a simple construction that only two positive lens and one negative lens are disposed therein. In that construction, the one negative lens bears the role of correcting the various aberrations occurring in the two positive lenses, in particular, spherical aberration at the telephoto end.

The condition (8) is provided, in view of the

above, for appropriately setting the focal length of the second lens unit suited for the lens construction of the second lens unit. If the upper limit of the condition (8) is exceeded, it becomes difficult to secure a required variable magnification ratio, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end. If the lower limit of the condition (8) is exceeded, it becomes difficult to correct spherical aberration at the telephoto end, in particular.

Further, according to the second embodiment, in order to attain the above-mentioned objective, the stop is made to be disposed at an appropriate position. In the zoom lens according to the second embodiment, at the telephoto end, such a refractive power arrangement is made that the first lens unit and the second lens unit are located close to each other to form a front lens group whose composite refractive power is positive, and, at a certain interval from the front lens group toward the image side, the third lens unit and the fourth lens unit are located close to each other to form a rear lens group whose composite refractive power is negative. In this refractive power arrangement, since an F-number light flux is converged by the front lens group, if the stop is disposed at a given interval from the front lens group toward the image side, the diameter of the stop can be made small. Accordingly, it is possible to prevent

the size of the whole optical apparatus from increasing due to the increased size or complication of a mechanism of the stop.

On the other hand, at the wide-angle end, such a refractive power arrangement is made that the first lens unit is located as a front lens group of negative refractive power, and, at a certain interval from the front lens group toward the image side, the second lens group and the third lens group are located to close to each other to form an intermediate lens group whose composite refractive power is positive, and, further, at a certain interval from the intermediate lens group toward the image side, the fourth lens unit is located as a rear lens group of positive refractive power. In this refractive power arrangement, if the stop is disposed in the vicinity of the intermediate lens group, the diameter of a front lens member and the diameter of a rear lens member balance, so that an advantage arises in reducing the size of the entire zoom lens.

In the second embodiment, for the above-described reason, the stop is disposed in the vicinity of the third lens unit, thereby forming a construction advantageous for the reduction in size and cost of the whole optical apparatus.

In the second embodiment, desirably, it is preferred that the conditions (7) and (8) are limited to the following ranges:

$$1.2 < |f_1/f_w| < 1.4 \quad \dots (7)'$$

$$0.9 < f_2/f_w < 1.0$$

...(8)'

While the zoom lens according to the second embodiment is realized by satisfying the above-described conditions, in order to further attain the shortening of the total length of the zoom lens while maintaining good optical performance, it is desirable to satisfy at least one of the following conditions.

(b-1) The stop is disposed on the object side of the third lens unit.

With the stop disposed on the object side of the third lens unit, it is possible to advantageously attain both the above-mentioned advantageous effect and the simplification of the structure of a lens barrel holding the third lens unit.

(b-2) The second lens unit and the fourth lens unit move in unison with each other during the variation of magnification.

If the second lens unit and the fourth lens unit are made to move in unison with each other during the variation of magnification, it is possible to advantageously simplify the structure of a lens barrel.

(b-3) The third lens unit comprises one positive lens and one negative lens, and satisfies the following condition:

$$1.5 < |f_3/f_w| < 3.0$$

...(9)

where f_3 is a focal length of the third lens unit.

The condition (9) is provided for appropriately setting the focal length of the third lens unit. If the

upper limit of the condition (9) is exceeded, it becomes difficult to set a composite refractive power of the third lens unit and the fourth lens unit at the telephoto end to a sufficient negative refractive power, or it becomes difficult to secure a bright F-number at the telephoto end, because it becomes hard for the zoom lens to take a refractive power arrangement of the telephoto type at the telephoto end. If the lower limit of the condition (9) is exceeded, it becomes difficult to correct, in particular, coma and distortion throughout the whole focal length range.

Desirably, it is preferred that the condition (9) is limited to the following range:

$$1.7 < |f_3/f_w| < 2.6 \quad \dots(9)'$$

(b-4) The fourth lens unit comprises one positive lens and one negative lens, and satisfies the following condition:

$$2.5 < f_4/f_w < 8.0 \quad \dots(10)$$

where f_4 is a focal length of the fourth lens unit.

The condition (10) is provided for appropriately setting the focal length of the fourth lens unit. If the upper limit of the condition (10) is exceeded, it becomes difficult to correct, in particular, spherical aberration at the telephoto end. If the lower limit of the condition (10) is exceeded, it becomes difficult to correct negative distortion at the wide-angle end.

Desirably, it is preferred that the condition (10) is limited to the following range:

$$2.8 < f_4/f_w < 7.0 \quad \dots(10)'$$

(b-5) The second lens unit has a cemented lens composed of a negative lens and a positive lens, and satisfies the following condition:

$$20 < v_{2p}-v_{2n} \quad \dots(11)$$

where v_{2p} is an Abbe number of a material of the positive lens of the cemented lens of the second lens unit, and v_{2n} is an Abbe number of a material of the negative lens of the cemented lens of the second lens unit.

With a cemented lens composed of a negative lens and a positive lens disposed in the second lens unit, and the condition (11) satisfied, it becomes easy to correct well negative longitudinal chromatic aberration at the telephoto end.

The condition (11) is provided for defining Abbe numbers of the negative lens and the positive lens of the cemented lens. If the condition (11) is not satisfied, it becomes difficult to correct well negative longitudinal chromatic aberration at the telephoto end.

Desirably, it is preferred that the condition (11) is limited to the following range:

$$25 < v_{2p}-v_{2n} \quad \dots(11)'$$

(b-6) The third lens unit has a cemented lens composed of a negative lens and a positive lens, and satisfies the following condition:

$$4.0 < v_{3n}-v_{3p} < 12.0 \quad \dots(12)$$

$$0.05 < N_{3p}-N_{3n} < 0.20 \quad \dots(13)$$

where v_{3n} is an Abbe number of a material of the negative

lens of the cemented lens of the third lens unit, v_{3p} is an Abbe number of a material of the positive lens of the cemented lens of the third lens unit, N_{3p} is a refractive index of the positive lens of the cemented lens of the third lens unit, and N_{3n} is a refractive index of the negative lens of the cemented lens of the third lens unit.

With a cemented lens disposed in the third lens unit and the conditions (12) and (13) satisfied, it becomes easy to correct well chromatic aberration, spherical aberration and coma throughout the whole focal length range.

The condition (12) is provided for appropriately setting the Abbe numbers of the materials of the negative lens and the positive lens of the cemented lens of the third lens unit. If the upper limit of the condition (12) is exceeded, longitudinal chromatic aberration becomes over-corrected, so that it becomes difficult to correct well longitudinal chromatic aberration in the entire zoom lens by cancellation with longitudinal chromatic aberration remaining in the first lens unit and the second lens unit, in particular, at the telephoto end.

If the lower limit of the condition (12) is exceeded, longitudinal chromatic aberration becomes under-corrected, so that it becomes difficult to correct well longitudinal chromatic aberration at the wide-angle end.

The condition (13) is provided for appropriately setting the refractive indices of the materials of the negative lens and the positive lens of the cemented lens of the third lens unit. If the upper limit of the condition (13) is exceeded, a positive refractive power in the cementing surface of the cemented lens becomes too strong, so that it becomes difficult to maintain a negative refractive power of the whole third lens unit. As a result, it becomes difficult for the entire zoom lens to secure a sufficient variable magnification ratio. If the lower limit of the condition (13) is exceeded, a positive refractive power in the cementing surface of the cemented lens becomes too weak, so that it becomes difficult to cancel, with the cementing surface, coma occurring in the third lens unit.

Desirably, it is preferred that the conditions (12) and (13) are limited to the following ranges:

$$5.0 < v_{3n} - v_{3p} < 10.0 \quad \dots (12)'$$

$$0.08 < N_{3p} - N_{3n} < 0.17 \quad \dots (13)'$$

(b-7) The fourth lens unit has at least one aspheric surface.

With an aspheric surface applied to the fourth lens unit, it advantageously becomes easy to correct curvature of field and distortion at the wide-angle end and spherical aberration at the telephoto end.

Desirably, it is preferred that the aspheric surface is formed such that a negative refractive power thereof becomes progressively stronger according to a

distance away from the optical axis.

(b-8) The fourth lens unit has a plastic aspheric lens.

With the aspheric surface applied to a plastic lens, an advantage arises in respect of manufacture.

Next, numerical data of the numerical examples 1 to 7 of the invention are shown. In the numerical data of the numerical examples 1 to 7, R_i denotes the radius of curvature of the i -th surface, when counted from the object side, D_i denotes the i -th optical member thickness or air separation, when counted from the object side, N_i and v_i respectively denote the refractive index and Abbe number of the i -th optical member, when counted from the object side.

The shape of an aspheric surface is expressed in the coordinates with an X axis in the optical axis direction (the direction in which light advances) and a Y axis in the direction perpendicular to the optical axis, by the following equation:

$$X = \frac{(1/R)Y^2}{1 + \sqrt{1 - (Y/R)^2}} + BY^4 + CY^6 + DY^8 + EY^{10}$$

where R is the radius of curvature of a central portion of a lens surface, and B , C , D and E are aspheric coefficients.

Further, the indication "e-X" means " $\times 10^{-X}$ ". The values of the factors in the above-mentioned conditions (3) to (13) for the numerical examples 1 to 7

are listed in Table-1.

Numerical Example 1:

f= 28.90 - 86.90 Fno= 3.85 - 5.88 2ω = 73.6° - 28.0°

R 1=	40.020	D 1=	1.80	N 1=	1.622992	v 1=	58.2
R 2=	18.658	D 2=	9.38				
R 3=	-87.765	D 3=	1.60	N 2=	1.603112	v 2=	60.6
R 4=	40.889	D 4=	0.15				
R 5=	28.885	D 5=	2.70	N 3=	1.846660	v 3=	23.8
R 6=	52.234	D 6=	Variable				
R 7=	53.877	D 7=	1.95	N 4=	1.670029	v 4=	47.2
R 8=	-202.578	D 8=	0.15				
R 9=	26.488	D 9=	1.00	N 5=	1.846660	v 5=	23.8
R10=	15.343	D10=	5.16	N 6=	1.603112	v 6=	60.6
R11=	-108.654	D11=	Variable				
R12=	Stop	D12=	1.82				
R13=	-65.732	D13=	0.80	N 7=	1.647689	v 7=	33.8
R14=	13.285	D14=	2.77	N 8=	1.761821	v 8=	26.5
R15=	42.673	D15=	Variable				
R16=	-126.063	D16=	1.00	N 9=	1.583060	v 9=	30.2
*R17=	-390.038	D17=	0.34				
R18=	-175.779	D18=	2.32	N10=	1.516330	v10=	64.1
R19=	-30.398	D19=	Variable				
R20=	Flare Cutter						

*: Aspheric Surface

Variable Separation	Focal Length		
	28.90	50.07	86.90
D 6	34.63	12.75	1.10
D11	2.02	7.12	12.75
D15	14.07	8.97	3.34
D19	0.00	12.98	36.87

Aspheric Coefficients:

R17 B= 1.85409e-05 C= 1.98751e-08 D= 4.89571e-10
E=-3.02884e-12

Numerical Example 2:

f= 28.90 - 86.90 Fno= 3.85 - 5.88 $2\omega = 73.6^\circ - 28.0^\circ$
R 1= 39.739 D 1= 1.80 N 1= 1.622992 v 1= 58.2
R 2= 18.639 D 2= 9.45
R 3= -87.988 D 3= 1.60 N 2= 1.603112 v 2= 60.6
R 4= 41.058 D 4= 0.15
R 5= 28.801 D 5= 2.70 N 3= 1.846660 v 3= 23.8
R 6= 51.498 D 6= Variable
R 7= 53.227 D 7= 1.95 N 4= 1.670029 v 4= 47.2
R 8= -205.057 D 8= 0.15
R 9= 26.663 D 9= 1.00 N 5= 1.846660 v 5= 23.8
R10= 15.329 D10= 5.16 N 6= 1.603112 v 6= 60.6
R11= -107.661 D11= Variable
R12= Stop D12= 1.83
R13= -65.510 D13= 0.80 N 7= 1.639799 v 7= 34.5
R14= 13.483 D14= 2.73 N 8= 1.761821 v 8= 26.5
R15= 41.372 D15= Variable

R16= -133.800 D16= 1.00 N 9= 1.583060 v 9= 30.2
 *R17= -407.135 D17= 0.34
 R18= -191.639 D18= 2.39 N10= 1.487490 v10= 70.2
 R19= -29.551 D19= Variable
 R20= Flare Cutter
 *: Aspheric Surface

Variable Separation	Focal Length		
	28.90	49.99	86.90
D 6	34.65	12.80	1.10
D11	2.02	7.15	12.82
D15	14.16	9.04	3.37
D19	0.00	12.91	36.87

Aspheric Coefficients:

R17 B= 1.84446e-05 C= 2.19637e-08 D= 3.96874e-10
 E=-2.39010e-12

Numerical Example 3:

f= 28.91 - 86.87 Fno= 4.16 - 5.88 2ω= 73.6° - 28.0°
 R 1= 43.239 D 1= 1.80 N 1= 1.666718 v 1= 48.3
 R 2= 19.880 D 2= 9.03
 R 3= -78.719 D 3= 1.60 N 2= 1.622992 v 2= 58.2
 R 4= 55.339 D 4= 0.15
 R 5= 32.137 D 5= 2.71 N 3= 1.846660 v 3= 23.8
 R 6= 57.907 D 6= Variable
 R 7= 39.559 D 7= 1.00 N 4= 1.846660 v 4= 23.8
 R 8= 21.679 D 8= 4.14 N 5= 1.603112 v 5= 60.6

R 9= -77.549 D 9= 0.10
 R10= 34.078 D10= 2.48 N 6= 1.622992 v 6= 58.2
 R11= -507.551 D11= Variable
 R12= Stop D12= 1.72
 R13= -85.718 D13= 0.80 N 7= 1.666718 v 7= 48.3
 R14= 11.985 D14= 2.87 N 8= 1.762001 v 8= 40.1
 R15= 49.521 D15= Variable
 R16= -110.546 D16= 1.00 N 9= 1.583060 v 9= 30.2
 *R17= 113.098 D17= 0.79
 R18= -185.957 D18= 2.27 N10= 1.516330 v10= 64.1
 R19= -28.408 D19= Variable
 R20= Flare Cutter
 *: Aspheric Surface

Variable Separation	Focal Length		
	28.91	50.03	86.87
D 6	38.34	14.02	0.97
D11	1.89	8.09	14.94
D15	15.04	8.84	1.99
D19	0.00	11.61	34.15

Aspheric Coefficients:

R17 B= 2.38066e-05 C= 1.49850e-07 D=-1.89543e-09
 E= 1.00939e-11

Numerical Example 4:

f= 28.90 - 86.89 Fno= 3.98 - 5.88 2ω= 73.6° - 28.0°
 R 1= 43.859 D 1= 1.80 N 1= 1.622992 v 1= 58.2

R 2=	18.850	D 2=	8.98				
R 3=	-81.993	D 3=	1.60	N 2=	1.603112	v 2=	60.6
R 4=	55.710	D 4=	0.15				
R 5=	29.393	D 5=	2.55	N 3=	1.846660	v 3=	23.8
R 6=	47.573	D 6=	Variable				
R 7=	56.647	D 7=	2.08	N 4=	1.701536	v 4=	41.2
R 8=	-190.859	D 8=	0.10				
R 9=	27.900	D 9=	1.00	N 5=	1.846660	v 5=	23.8
R10=	15.524	D10=	4.72	N 6=	1.603112	v 6=	60.6
R11=	-129.021	D11=	Variable				
R12=	Stop	D12=	1.74				
R13=	-81.635	D13=	0.80	N 7=	1.672700	v 7=	32.1
R14=	14.073	D14=	2.61	N 8=	1.805181	v 8=	25.4
R15=	48.771	D15=	Variable				
R16=	-139.337	D16=	1.00	N 9=	1.583060	v 9=	30.2
*R17=	264.589	D17=	0.66				
R18=	-163.311	D18=	2.45	N10=	1.516330	v10=	64.1
R19=	-7.550	D19=	Variable				
R20=	Flare Cutter						
*: Aspheric Surface							

Variable Separation	Focal Length		
	28.90	50.08	86.89
D 6	35.70	13.01	0.99
D11	1.68	8.12	14.99
D15	15.37	8.93	2.05
D19	0.00	12.75	36.95

Aspheric Coefficients:

R17 B= 1.94921e-05 C= 1.60327e-08 D= 3.08711e-10
E=-2.21116e-12

Numerical Example 5:

f= 28.90 - 86.89 Fno= 4.00 - 5.88 2ω= 73.6° - 28.0°
R 1= 35.198 D 1= 1.80 N 1= 1.723420 v 1= 38.0
R 2= 18.688 D 2= 9.91
R 3= -75.702 D 3= 1.60 N 2= 1.622992 v 2= 58.2
R 4= 42.141 D 4= 0.90
R 5= 31.598 D 5= 2.97 N 3= 1.846660 v 3= 23.8
R 6= 71.860 D 6= Variable
R 7= 43.415 D 7= 2.30 N 4= 1.658441 v 4= 50.9
R 8= -241.234 D 8= 0.10
R 9= 27.190 D 9= 1.00 N 5= 1.846660 v 5= 23.8
R10= 15.034 D10= 5.65 N 6= 1.570989 v 6= 50.8
R11= -97.682 D11= Variable
R12= Stop D12= 1.77
R13= -74.227 D13= 0.80 N 7= 1.688931 v 7= 31.1
R14= 14.230 D14= 2.47 N 8= 1.805181 v 8= 25.4
R15= 58.520 D15= Variable
R16= 3775.366 D16= 1.00 N 9= 1.583060 v 9= 30.2
*R17= 54.758 D17= 1.13
R18= -120.938 D18= 2.30 N10= 1.516330 v10= 64.1
R19= -26.355 D19= Variable
R20= Flare Cutter

*: Aspheric Surface

Variable Separation	Focal Length		
	28.90	50.59	86.89
D 6	38.01	13.73	1.09
D11	1.55	7.20	13.24
D15	12.71	7.06	1.02
D19	0.00	13.30	36.95

Aspheric Coefficients:

R17 B= 2.14995e-05 C=-1.88071e-08 D= 6.82596e-10
E=-4.81611e-12

Numerical Example 6:

f= 28.90 - 86.89 Fno= 3.83 - 5.88 2 ω = 73.6° - 28.0°
R 1= 37.748 D 1= 1.80 N 1= 1.622992 v 1= 58.2
R 2= 18.350 D 2= 9.59
R 3= -90.750 D 3= 1.60 N 2= 1.622992 v 2= 58.2
R 4= 43.103 D 4= 0.15
R 5= 28.478 D 5= 2.62 N 3= 1.846660 v 3= 23.8
R 6= 48.635 D 6= Variable
R 7= 50.008 D 7= 2.00 N 4= 1.701536 v 4= 41.2
R 8= -267.513 D 8= 0.10
R 9= 26.915 D 9= 1.00 N 5= 1.846660 v 5= 23.8
R10= 15.023 D10= 5.26 N 6= 1.603112 v 6= 60.6
R11= -101.063 D11= Variable
R12= Stop D12= 1.80
R13= -68.910 D13= 0.80 N 7= 1.688931 v 7= 31.1
R14= 13.828 D14= 2.64 N 8= 1.846660 v 8= 23.8
R15= 39.654 D15= Variable

R16= -90.382 D16= 1.00 N 9= 1.583060 v 9= 30.2
 *R17= -205.313 D17= 0.40
 R18= -190.913 D18= 2.42 N10= 1.516330 v10= 64.1
 R19= -29.325 D19= Variable
 R20= Flare Cutter
 *: Aspheric Surface

Variable Separation	Focal Length		
	28.90	50.02	86.89
D 6	34.38	12.71	1.09
D11	2.00	6.87	12.46
D15	14.09	9.21	3.62
D19	0.00	13.06	36.80

Aspheric Coefficients:

R17 B= 1.91256e-05 C= 4.84357e-08 D=-2.85693e-10
 E= 1.98932e-12

Numerical Example 7:

f= 28.90 - 82.00 Fno= 4.13 - 5.88 2ω= 73.6° - 29.6°
 R 1= 44.569 D 1= 1.80 N 1= 1.666718 v 1= 48.3
 R 2= 19.439 D 2= 8.76
 R 3= -83.196 D 3= 1.60 N 2= 1.622992 v 2= 58.2
 R 4= 53.624 D 4= 0.15
 R 5= 31.347 D 5= 2.81 N 3= 1.846660 v 3= 23.8
 R 6= 59.986 D 6= Variable
 R 7= 37.347 D 7= 1.00 N 4= 1.846660 v 4= 23.8
 R 8= 20.840 D 8= 3.82 N 5= 1.603112 v 5= 60.6

R 9= -109.250 D 9= 0.10
 R10= 33.997 D10= 2.42 N 6= 1.622992 v 6= 58.2
 R11= -289.876 D11= Variable
 R12= Stop D12= 1.71
 R13= -89.465 D13= 0.80 N 7= 1.666718 v 7= 48.3
 R14= 11.810 D14= 2.95 N 8= 1.762001 v 8= 40.1
 R15= 54.376 D15= Variable
 R16= -81.002 D16= 1.00 N 9= 1.583060 v 9= 30.2
 *R17= 148.189 D17= 0.72
 R18= -129.191 D18= 2.18 N10= 1.516330 v10= 64.1
 R19= -25.978 D19= Variable
 R20= Flare Cutter
 *: Aspheric Surface

Variable Separation	Focal Length		
	28.90	49.50	82.00
D 6	35.36	12.77	1.10
D11	1.86	7.37	12.74
D15	12.77	7.27	1.90
D19	0.00	12.64	34.15

Aspheric Coefficients:

R17 B= 2.78750e-05 C= 1.33153e-07 D=-1.58437e-09
 E= 9.93954e-12

Table-1

Condition	Numerical Example			
	1	2	3	4
(3) $ f1/fw $	1.275	1.275	1.322	1.299
(4) $f2/fw$	0.944	0.945	0.949	0.992
(5) $ f3/fw $	1.803	1.803	2.270	2.256
(6) $f4/fw$	3.107	3.081	6.297	3.607

Condition	Numerical Example		
	5	6	7
(3) $ f1/fw $	1.323	1.270	1.334
(4) $f2/fw$	0.968	0.933	0.962
(5) $ f3/fw $	2.320	1.735	2.581
(6) $f4/fw$	6.348	2.992	6.453

Condition	Numerical Example			
	1	2	3	4
(7) $ f1/fw $	1.275	1.275	1.322	1.299
(8) $f2/fw$	0.944	0.945	0.949	0.992
(9) $ f3/fw $	1.803	1.803	2.270	2.256
(10) $f4/fw$	3.107	3.081	6.297	3.607
(11) $v2p-v2n$	36.860	36.860	36.860	36.860
(12) $v3n-v3p$	7.270	7.940	8.220	6.680
(13) $N3p-N3n$	0.114	0.122	0.095	0.132

Condition	Numerical Example		
	5	6	7
(7) $ f_1/f_w $	1.323	1.270	1.334
(8) f_2/f_w	0.968	0.933	0.962
(9) $ f_3/f_w $	2.320	1.735	2.581
(10) f_4/f_w	6.348	2.992	6.453
(11) $v_{2p}-v_{2n}$	27.020	36.860	36.860
(12) $v_{3n}-v_{3p}$	5.650	7.290	8.220
(13) $N_{3p}-N_{3n}$	0.116	0.158	0.095

In the foregoing, the zoom lens according to the invention has been described. Next, in Fig. 29, there is shown a schematic diagram illustrating a projector (image projection apparatus) in which the zoom lens according to the invention is used. In the case of Fig. 29, a liquid crystal projector 1 of the three-plate type is taken as an example of the projector. In the liquid crystal projector 1, images formed by three image forming elements 5 are combined into a projection image by a prism 2, and the projection image is projected onto a screen 4 or the like by a projection lens 3 which is the zoom lens according to the invention. Of course, the zoom lens according to the invention may be used in apparatuses other than the projector, and the liquid crystal projector may be of the single-plate type. Further, in Fig. 30, there is shown a schematic diagram illustrating a camera (image pickup apparatus) 6 in which the zoom lens according to the invention is used. In the camera 6, light from an object 9 is imaged on a

photosensitive member (film, a CCD or the like) 7 inside the camera 6 by an image pickup lens 8 which is the zoom lens according to the invention. Of course, the zoom lens according to the invention may be used in image pickup apparatuses other than the camera, such as a video camera.

002250 629/060

CLAIMS

1. A zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, a third lens unit of negative refractive power, and a fourth lens unit of positive refractive power, wherein said first lens unit has a negative lens located on the most object side thereof, and said negative lens located on the most object side of said first lens unit satisfies the following conditions:

- (a) $35 < v_{11n} < 65$, and
- (b) when $35 < v_{11n} < 52$,
 $-0.013 v_{11n} + 2.19 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $52 < v_{11n} < 60$,
 $1.5 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $60 < v_{11n} < 65$,
 $1.5 < N_{11n} < -0.022 v_{11n} + 2.94$,

where v_{11n} is an Abbe number of a material of said negative lens located on the most object side of said first lens unit, and N_{11n} is a refractive index of the material of said negative lens located on the most object side of said first lens unit.

2. A zoom lens according to claim 1, wherein said first lens unit has a second negative lens other than said negative lens located on the most object side thereof, and said second negative lens satisfies the

following conditions:

(c) $35 < v_{12n} < 65$, and

(d) when $35 < v_{12n} < 52$,

$-0.013 v_{12n} + 2.19 < N_{12n} < -0.005 v_{12n} + 1.92$,

when $52 < v_{12n} < 60$,

$1.5 < N_{12n} < -0.005 v_{12n} + 1.92$,

when $60 < v_{12n} < 65$,

$1.5 < N_{12n} < -0.022 v_{12n} + 2.94$,

where v_{12n} is an Abbe number of a material of said second negative lens of said first lens unit, and N_{12n} is a refractive index of the material of said second negative lens of said first lens unit.

3. A zoom lens according to claim 1, wherein said zoom lens becomes, at a telephoto end, a telephoto type in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

4. A zoom lens according to claim 1, wherein, during variation of magnification from a wide-angle end to a telephoto end, said first lens unit moves with a locus convex toward the image side, said second lens unit moves toward the object side in such a way as to decrease a separation between said first lens unit and said second lens unit, said third lens unit moves toward the object

side in such a way as to increase a separation between said second lens unit and said third lens unit, and said fourth lens unit moves toward the object side in such a way as to decrease a separation between said third lens unit and said fourth lens unit.

5. A zoom lens according to claim 1, wherein said zoom lens satisfies the following condition:

$$0.9 < |f1/fw| < 1.8$$

where f1 is a focal length of said first lens unit, and fw is a focal length of said zoom lens in a wide-angle end.

6. A zoom lens according to claim 1, wherein said first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

7. A zoom lens according to claim 1, wherein said second lens unit and said fourth lens unit move in unison with each other during variation of magnification.

8. A zoom lens according to claim 1, wherein said zoom lens satisfies the following conditions:

$$0.65 < f2/fw < 1.3$$

$$1.2 < |f3/fw| < 3.4$$

where f_2 and f_3 are focal lengths of said second lens unit and said third lens unit, respectively, and f_w is a focal length of said zoom lens in a wide-angle end.

9. A zoom lens according to claim 1, wherein said zoom lens consists of said first to fourth lens units, and satisfies the following condition:

$$2.1 < f_4/f_w < 8.5$$

where f_4 is a focal length of said fourth lens unit, and f_w is a focal length of said zoom lens in a wide-angle end.

10. A zoom lens according to claim 1, wherein said second lens unit comprises two positive lenses and one negative lens.

11. A zoom lens according to claim 1, wherein said third lens unit comprises a cemented lens composed of a negative lens and a positive lens.

12. A zoom lens according to claim 1, wherein said fourth lens unit comprises a negative lens and a positive lens, and has at least one aspheric surface.

13. A zoom lens according to claim 1, wherein said second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens.

14. A zoom lens according to claim 1, wherein said fourth lens unit has a plastic aspheric lens.

15. A zoom lens according to claim 1, wherein said second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens, said third lens unit comprises a negative lens and a positive lens, and said fourth lens unit comprises a negative lens and a positive lens, and has a plastic aspheric lens.

16. An image pickup apparatus comprising a zoom lens according to claim 1, a photosensitive member, and means for supporting said zoom lens and said photosensitive member.

17. An image projection apparatus comprising a zoom lens according to claim 1, a light source, and an image forming element, and arranged to project an image.

18. A zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, and a third lens unit, wherein all said first to third lens units move during variation of magnification, said first lens unit has a negative lens located on the most object side thereof, and said negative lens located on the most object side of said

first lens unit satisfies the following conditions:

- (a) $35 < v_{11n} < 65$, and
- (b) when $35 < v_{11n} < 52$,
 $-0.013 v_{11n} + 2.19 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $52 < v_{11n} < 60$,
 $1.5 < N_{11n} < -0.005 v_{11n} + 1.92$,
when $60 < v_{11n} < 65$,
 $1.5 < N_{11n} < -0.022 v_{11n} + 2.94$,

where v_{11n} is an Abbe number of a material of said negative lens located on the most object side of said first lens unit, and N_{11n} is a refractive index of the material of said negative lens located on the most object side of said first lens unit.

19. A zoom lens according to claim 18, wherein said first lens unit has a second negative lens other than said negative lens located on the most object side thereof, and said second negative lens satisfies the following conditions:

- (c) $35 < v_{12n} < 65$, and
- (d) when $35 < v_{12n} < 52$,
 $-0.013 v_{12n} + 2.19 < N_{12n} < -0.005 v_{12n} + 1.92$,
when $52 < v_{12n} < 60$,
 $1.5 < N_{12n} < -0.005 v_{12n} + 1.92$,
when $60 < v_{12n} < 65$,
 $1.5 < N_{12n} < -0.022 v_{12n} + 2.94$,

where v_{12n} is an Abbe number of a material of said second negative lens of said first lens unit, and N_{12n} is a

refractive index of the material of said second negative lens of said first lens unit.

20. A zoom lens according to claim 18, wherein said third lens unit has a negative refractive power.

21. A zoom lens according to claim 18, wherein said zoom lens becomes, at a telephoto end, a telephoto type in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

22. A zoom lens according to claim 18, wherein said zoom lens satisfies the following condition:

$$0.9 < |f1/fw| < 1.8$$

where f1 is a focal length of said first lens unit, and fw is a focal length of said zoom lens in a wide-angle end.

23. A zoom lens according to claim 18, wherein said first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

24. A zoom lens according to claim 18, wherein said second lens unit comprises two positive lenses and one negative lens.

25. A zoom lens according to claim 18, wherein said third lens unit comprises a cemented lens composed of a negative lens and a positive lens.

26. A zoom lens according to claim 18, wherein said second lens unit comprises one positive lens and a positive cemented lens composed of a negative lens and a positive lens.

27. An image pickup apparatus comprising a zoom lens according to claim 18, a photosensitive member, and means for supporting said zoom lens and said photosensitive member.

28. An image projection apparatus comprising a zoom lens according to claim 18, a light source, and an image forming element, and arranged to project an image.

29. A zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power and a second lens unit of positive refractive power, said second lens unit of positive refractive power consisting of two positive lenses and one negative lens, wherein the following conditions are

satisfied:

$$1.1 < |f1/fw| < 1.4$$

$$0.8 < |f2/fw| < 1.1$$

where f1 and f2 are focal lengths of said first lens unit and said second lens unit, respectively, and fw is a focal length of said zoom lens in a wide-angle end.

30. A zoom lens according to claim 29, wherein said zoom lens becomes, at a telephoto end, a telephoto type in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

31. A zoom lens according to claim 29, wherein said first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

32. A zoom lens according to claim 29, wherein one of said two positive lenses and said one negative lens in said second lens unit are cemented together to form a cemented lens, and the following condition is satisfied:

$$20 < v2p - v2n$$

where v2p is an Abbe number of a material of said

positive lens of said cemented lens of said second lens unit, and v_{2n} is an Abbe number of a material of said negative lens of said cemented lens of said second lens unit.

33. An image pickup apparatus comprising a zoom lens according to claim 29, a photosensitive member, and means for supporting said zoom lens and said photosensitive member.

34. An image projection apparatus comprising a zoom lens according to claim 29, a light source, and an image forming element, and arranged to project an image.

35. A zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, and a third lens unit of negative refractive power, wherein the following conditions are satisfied:

$$1.1 < |f_1/f_w| < 1.4$$

$$0.8 < |f_2/f_w| < 1.1$$

where f_1 and f_2 are focal lengths of said first lens unit and said second lens unit, respectively, and f_w is a focal length of said zoom lens in a wide-angle end.

36. A zoom lens according to claim 35, wherein said zoom lens becomes, at a telephoto end, a telephoto type

in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

37. A zoom lens according to claim 35, wherein said first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

38. A zoom lens according to claim 35, wherein a stop is disposed adjacent to said third lens unit, said stop moving in unison with said third lens unit.

39. A zoom lens according to claim 38, wherein said stop is disposed on the object side of said third lens unit.

40. A zoom lens according to claim 35, wherein said third lens unit comprises one positive lens and one negative lens, and the following condition is further satisfied:

$$1.5 < |f_3/f_w| < 3.0$$

where f_3 is a focal length of said third lens unit.

41. A zoom lens according to claim 35, wherein said second lens unit has a cemented lens composed of a negative lens and a positive lens, and the following condition is further satisfied:

$$20 < v_{2p} - v_{2n}$$

where v_{2p} is an Abbe number of a material of said positive lens of said cemented lens of said second lens unit, and v_{2n} is an Abbe number of a material of said negative lens of said cemented lens of said second lens unit.

42. A zoom lens according to claim 35, wherein said third lens unit has a cemented lens composed of a negative lens and a positive lens, and the following conditions are further satisfied:

$$4.0 < v_{3n} - v_{3p} < 12.0$$

$$0.05 < N_{3p} - N_{3n} < 0.20$$

where v_{3n} is an Abbe number of a material of said negative lens of said cemented lens of said third lens unit, v_{3p} is an Abbe number of a material of said positive lens of said cemented lens of said third lens unit, N_{3p} is a refractive index of the material of said positive lens of said cemented lens of said third lens unit, and N_{3n} is a refractive index of the material of said negative lens of said cemented lens of said third lens unit.

43. An image pickup apparatus comprising a zoom

lens according to claim 35, a photosensitive member, and means for supporting said zoom lens and said photosensitive member.

44. An image projection apparatus comprising a zoom lens according to claim 35, a light source, and an image forming element, and arranged to project an image.

45. A zoom lens comprising, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, a third lens unit of negative refractive power, and a fourth lens unit of positive refractive power, wherein the following conditions are satisfied:

$$1.1 < |f_1/f_w| < 1.4$$

$$0.8 < |f_2/f_w| < 1.1$$

where f_1 and f_2 are focal lengths of said first lens unit and said second lens unit, respectively, and f_w is a focal length of said zoom lens in a wide-angle end.

46. A zoom lens according to claim 45, wherein said zoom lens becomes, at a telephoto end, a telephoto type in which a plurality of lens units are divided into a lens group on the object side composed of at least one lens unit having a positive refractive power and a lens group on the image side composed of at least one lens unit having a negative refractive power.

47. A zoom lens according to claim 45, wherein, during variation of magnification from a wide-angle end to a telephoto end, said first lens unit moves with a locus convex toward the image side, said second lens unit moves toward the object side in such a way as to decrease a separation between said first lens unit and said second lens unit, said third lens unit moves toward the object side in such a way as to increase a separation between said second lens unit and said third lens unit, and said fourth lens unit moves toward the object side in such a way as to decrease a separation between said third lens unit and said fourth lens unit.

48. A zoom lens according to claim 45, wherein said first lens unit comprises, in order from the object side to the image side, a negative lens of meniscus form having a convex surface facing the object side, a negative lens, and a positive lens of meniscus form having a convex surface facing the object side.

49. A zoom lens according to claim 45, wherein a stop is disposed adjacent to said third lens unit, said stop moving in unison with said third lens unit.

50. A zoom lens according to claim 49, wherein said stop is disposed on the object side of said third lens unit.

51. A zoom lens according to claim 45, wherein said second lens unit and said fourth lens unit move in unison with each other during variation of magnification.

52. A zoom lens according to claim 45, wherein said third lens unit comprises one positive lens and one negative lens, and the following condition is further satisfied:

$$1.5 < |f_3/f_w| < 3.0$$

where f_3 is a focal length of said third lens unit.

53. A zoom lens according to claim 45, wherein said zoom lens consists of said first to fourth lens units, said fourth lens unit comprises one positive lens and one negative lens, and the following condition is further satisfied:

$$2.5 < |f_4/f_w| < 8.0$$

where f_4 is a focal length of said fourth lens unit.

54. A zoom lens according to claim 45, wherein said second lens unit has a cemented lens composed of a negative lens and a positive lens, and the following condition is further satisfied:

$$20 < v_{2p} - v_{2n}$$

where v_{2p} is an Abbe number of a material of said positive lens of said cemented lens of said second lens unit, and v_{2n} is an Abbe number of a material of said negative lens of said cemented lens of said second lens

unit.

55. A zoom lens according to claim 45, wherein said third lens unit has a cemented lens composed of a negative lens and a positive lens, and the following conditions are further satisfied:

$$4.0 < v_{3n} - v_{3p} < 12.0$$

$$0.05 < N_{3p} - N_{3n} < 0.20$$

where v_{3n} is an Abbe number of a material of said negative lens of said cemented lens of said third lens unit, v_{3p} is an Abbe number of a material of said positive lens of said cemented lens of said third lens unit, N_{3p} is a refractive index of the material of said positive lens of said cemented lens of said third lens unit, and N_{3n} is a refractive index of the material of said negative lens of said cemented lens of said third lens unit.

56. A zoom lens according to claim 45, wherein said fourth lens unit has at least one aspheric surface.

57. A zoom lens according to claim 45, wherein said fourth lens unit has a plastic aspheric lens.

58. An image pickup apparatus comprising a zoom lens according to claim 45, a photosensitive member, and means for supporting said zoom lens and said photosensitive member.

59. An image projection apparatus comprising a zoom lens according to claim 45, a light source, and an image forming element, and arranged to project an image.

60. A zoom lens according to claim 1 or 18, wherein the following conditions are satisfied:

$$1.1 < |f1/fw| < 1.4$$

$$0.8 < |f2/fw| < 1.1$$

where f1 and f2 are focal lengths of said first lens unit and said second lens unit, respectively, and fw is a focal length of said zoom lens in a wide-angle end.

ABSTRACT OF THE DISCLOSURE

A zoom lens includes, in order from an object side to an image side, a first lens unit of negative refractive power, a second lens unit of positive refractive power, a third lens unit of negative refractive power, and a fourth lens unit of positive refractive power, wherein, during variation of magnification from a wide-angle end to a telephoto end, the first lens unit moves with a locus convex toward the image side, the second lens unit moves toward the object side in such a way as to decrease a separation between the first lens unit and the second lens unit, the third lens unit moves toward the object side in such a way as to increase a separation between the second lens unit and the third lens unit, and the fourth lens unit moves toward the object side in such a way as to decrease a separation between the third lens unit and the fourth lens unit, and wherein the Abbe number and refractive index of a negative lens included in the first lens unit are appropriately set.

FIG. 1A

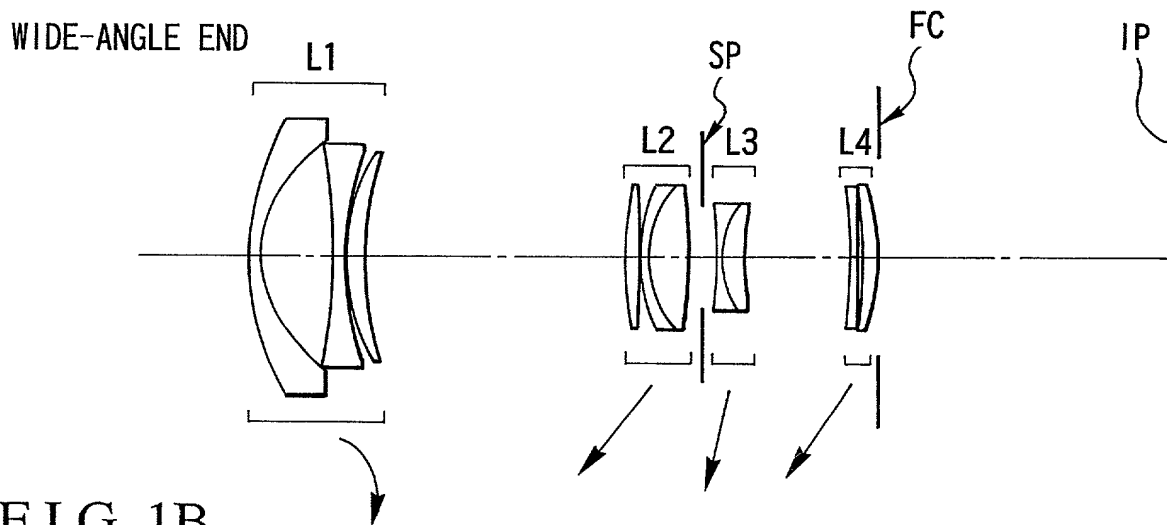


FIG. 1B


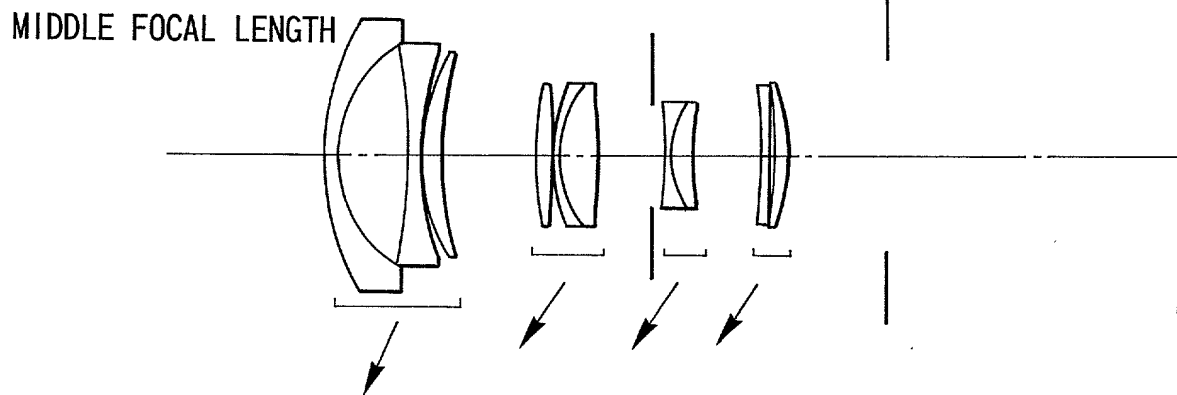


FIG. 1C

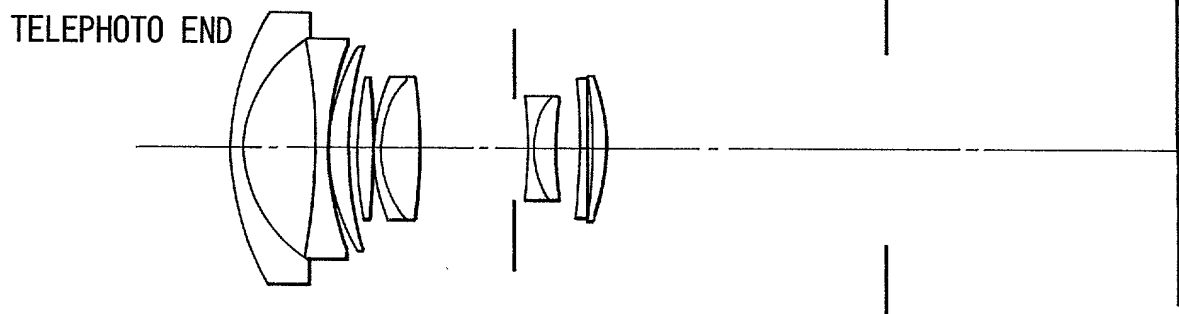

000250 26294360

FIG. 2A FIG. 2B FIG. 2C FIG. 2D

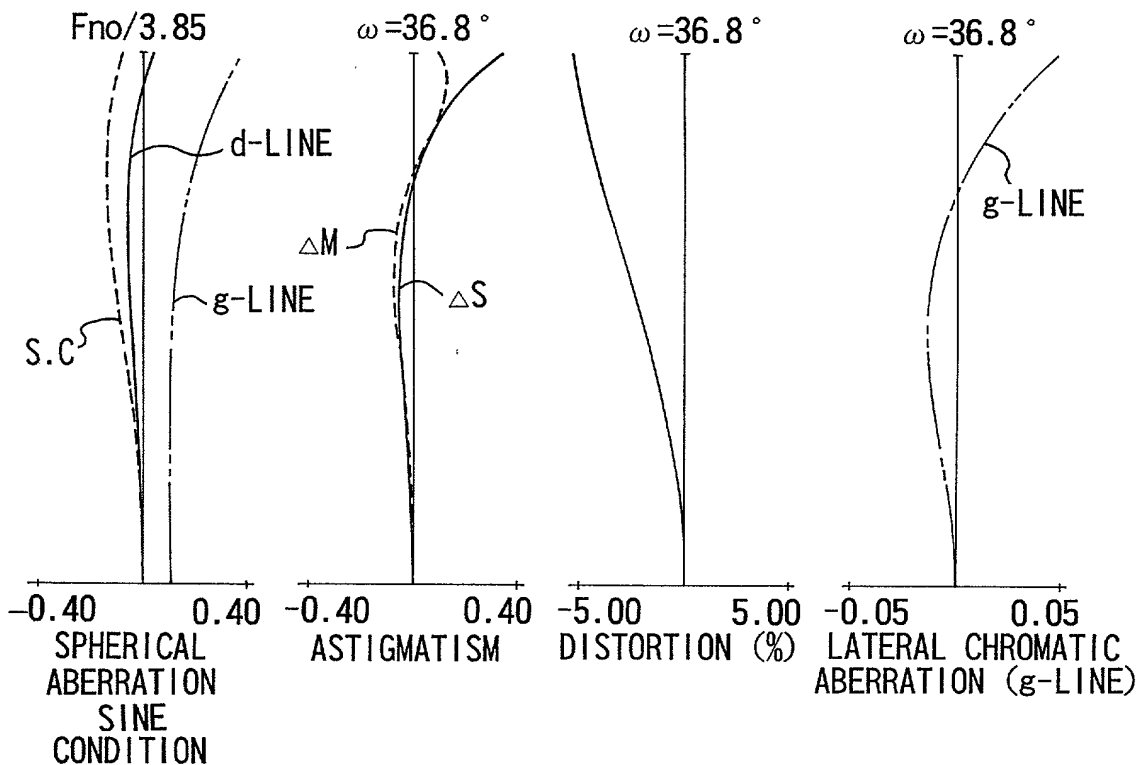


FIG. 3A FIG. 3B FIG. 3C FIG. 3D

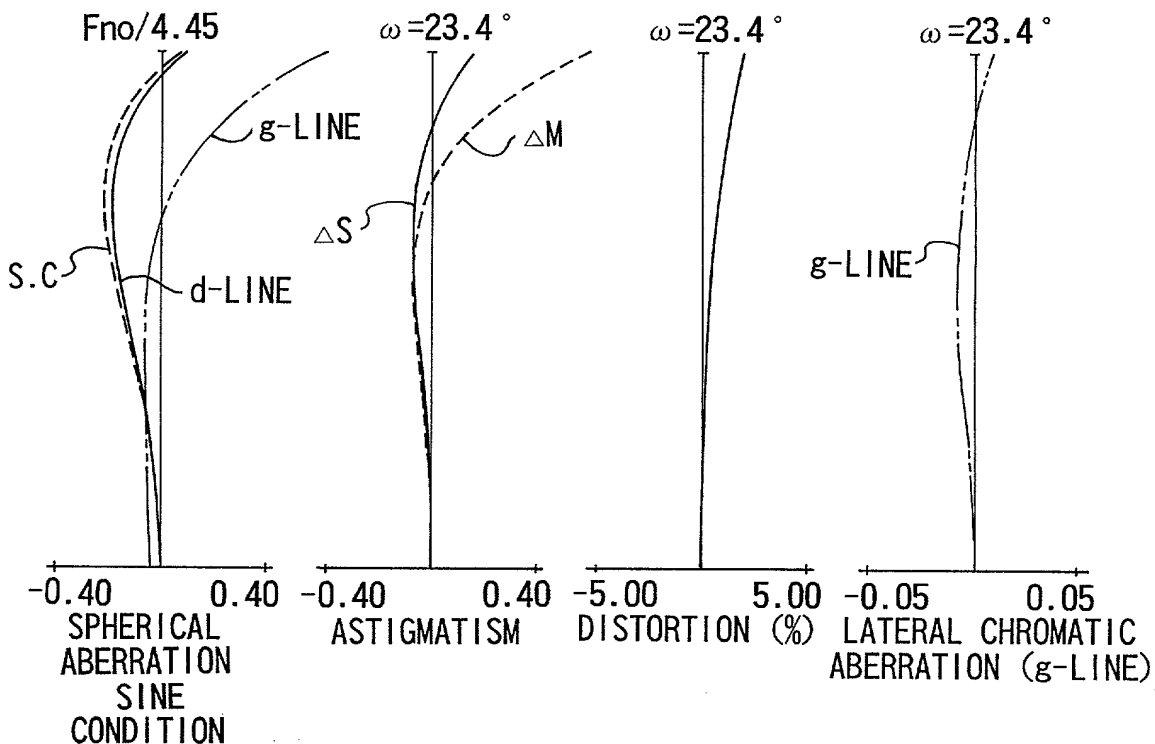


FIG. 4A FIG. 4B FIG. 4C FIG. 4D

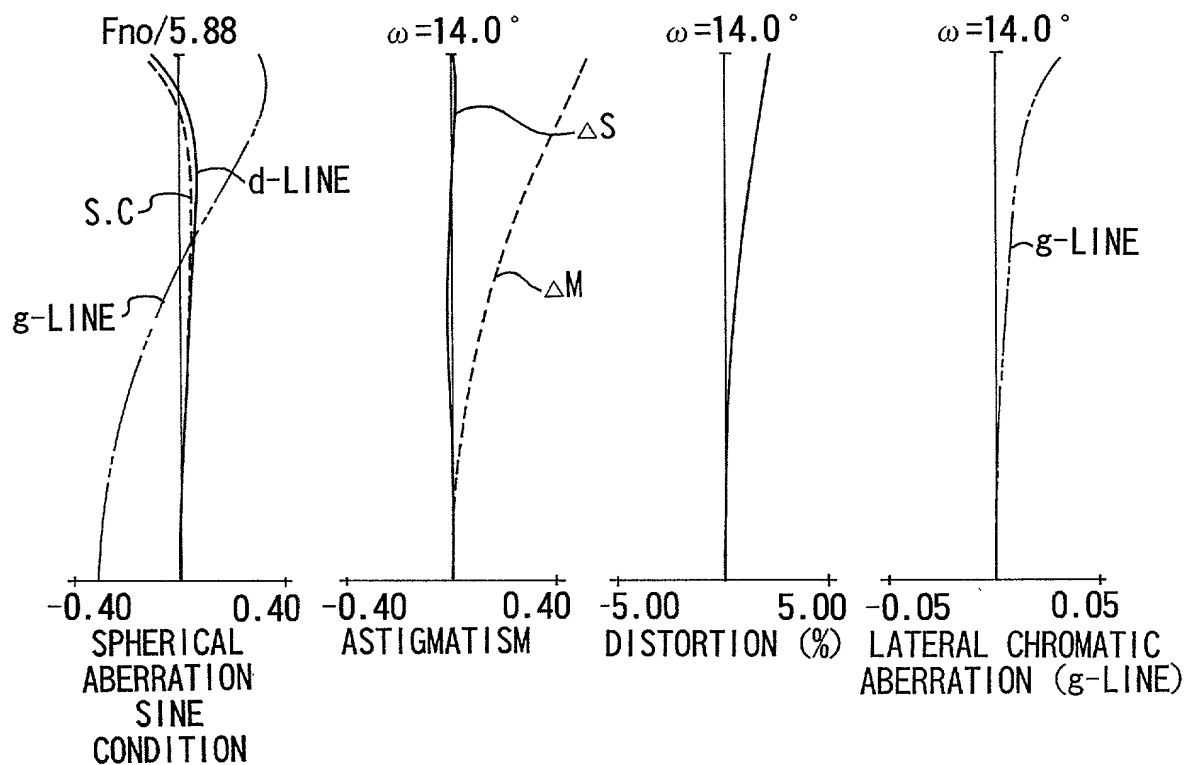


FIG. 5

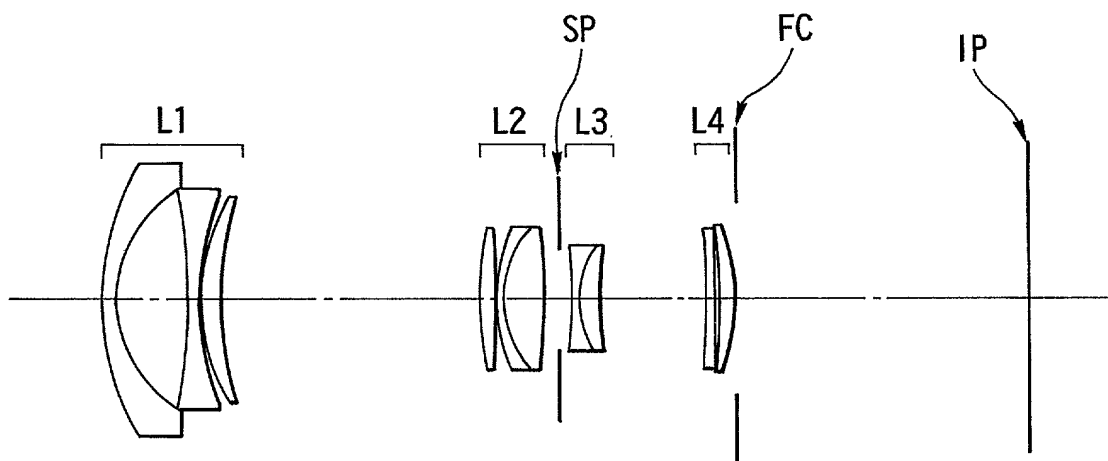


FIG. 6A FIG. 6B FIG. 6C FIG. 6D


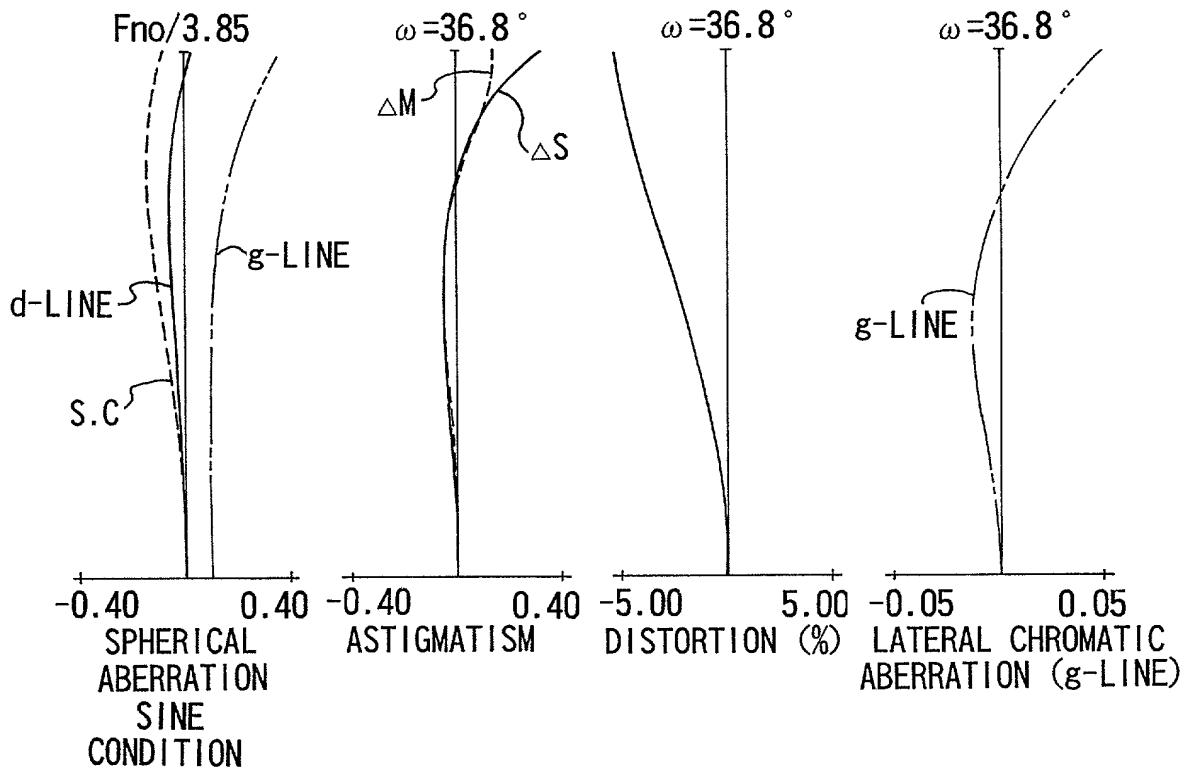


FIG. 7A FIG. 7B FIG. 7C FIG. 7D

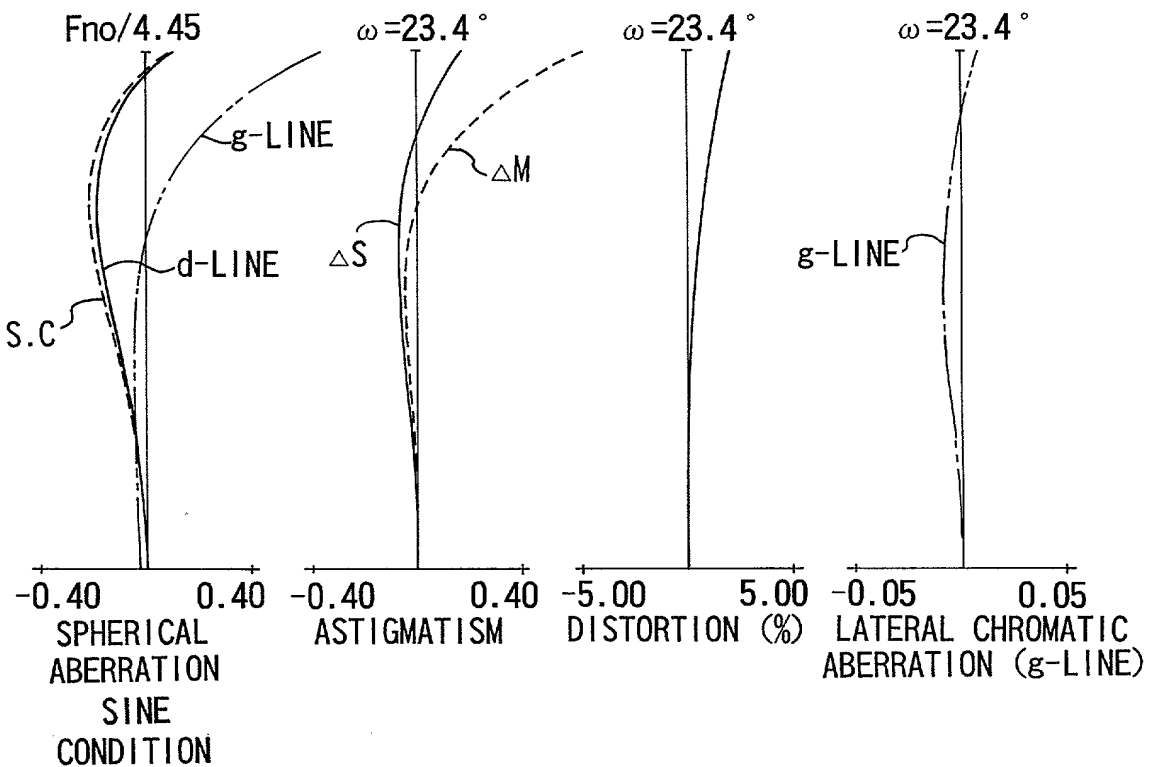

000000 46292560

FIG. 8A FIG. 8B FIG. 8C FIG. 8D

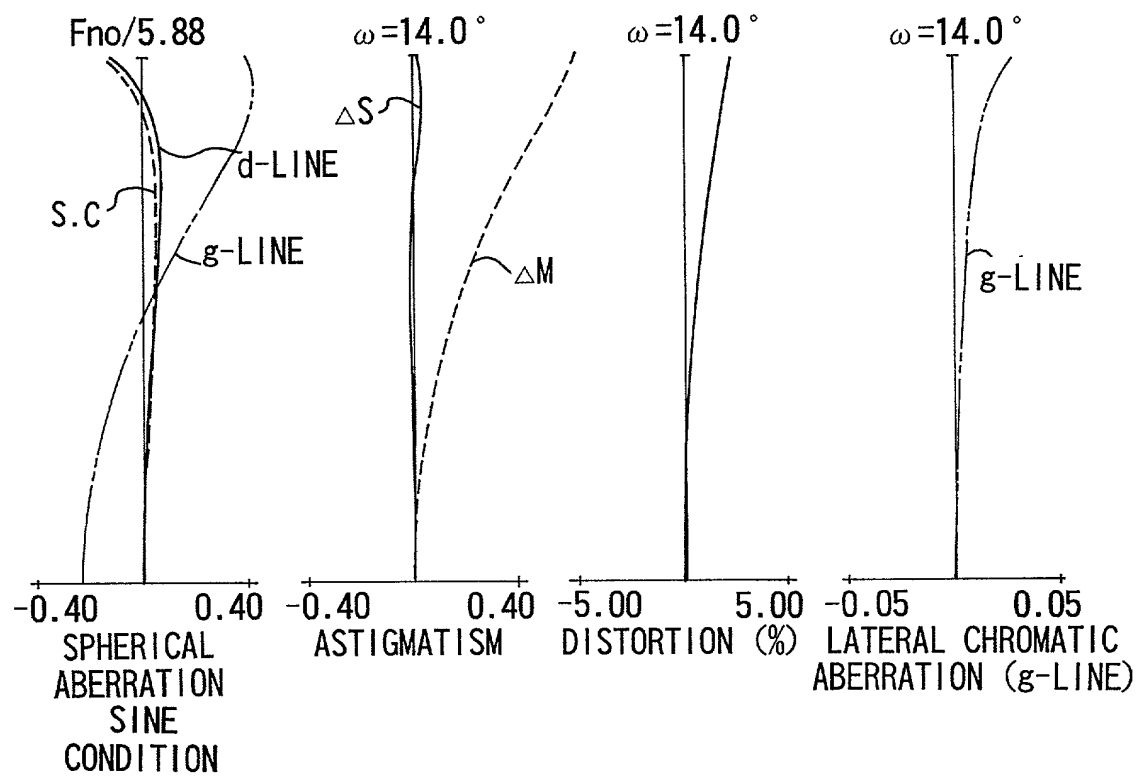


FIG. 9

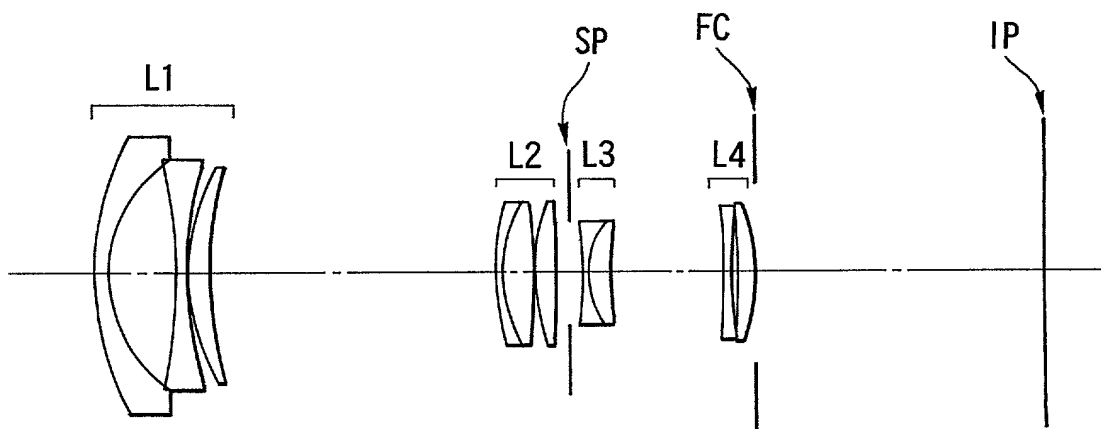


FIG. 10A FIG. 10B FIG. 10C FIG. 10D


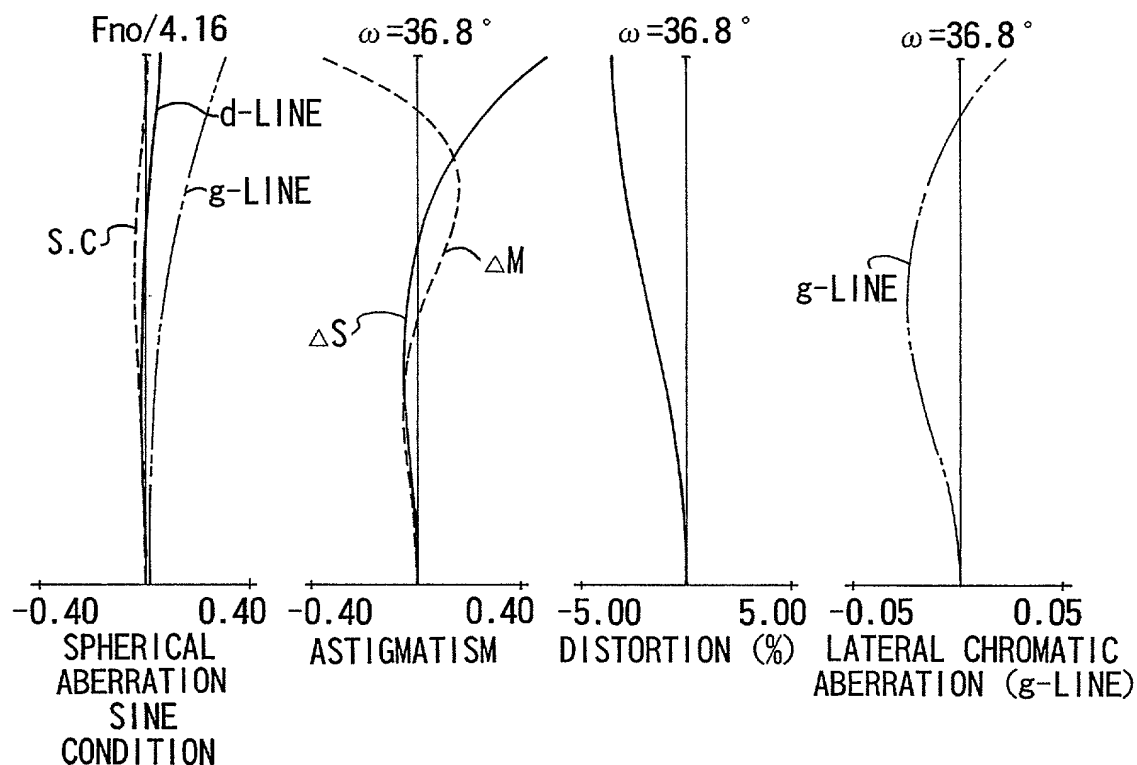


FIG. 11A FIG. 11B FIG. 11C FIG. 11D

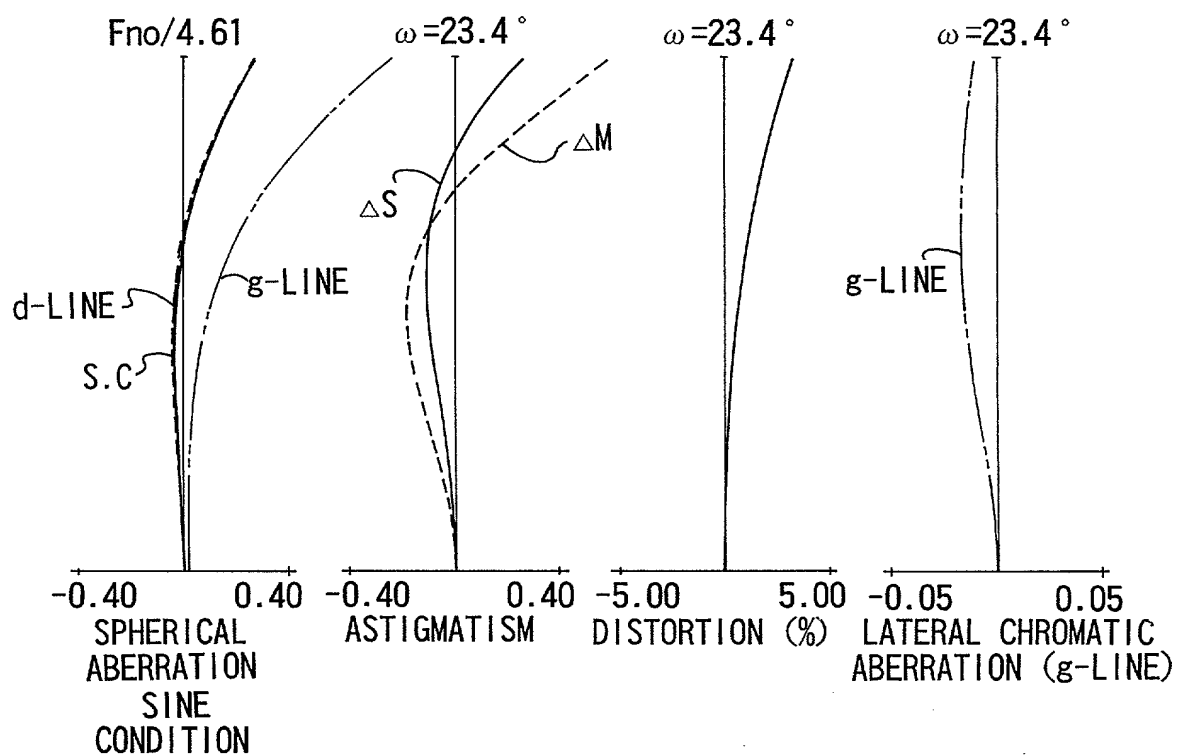

000000 46297360

FIG. 12A FIG. 12B FIG. 12C FIG. 12D

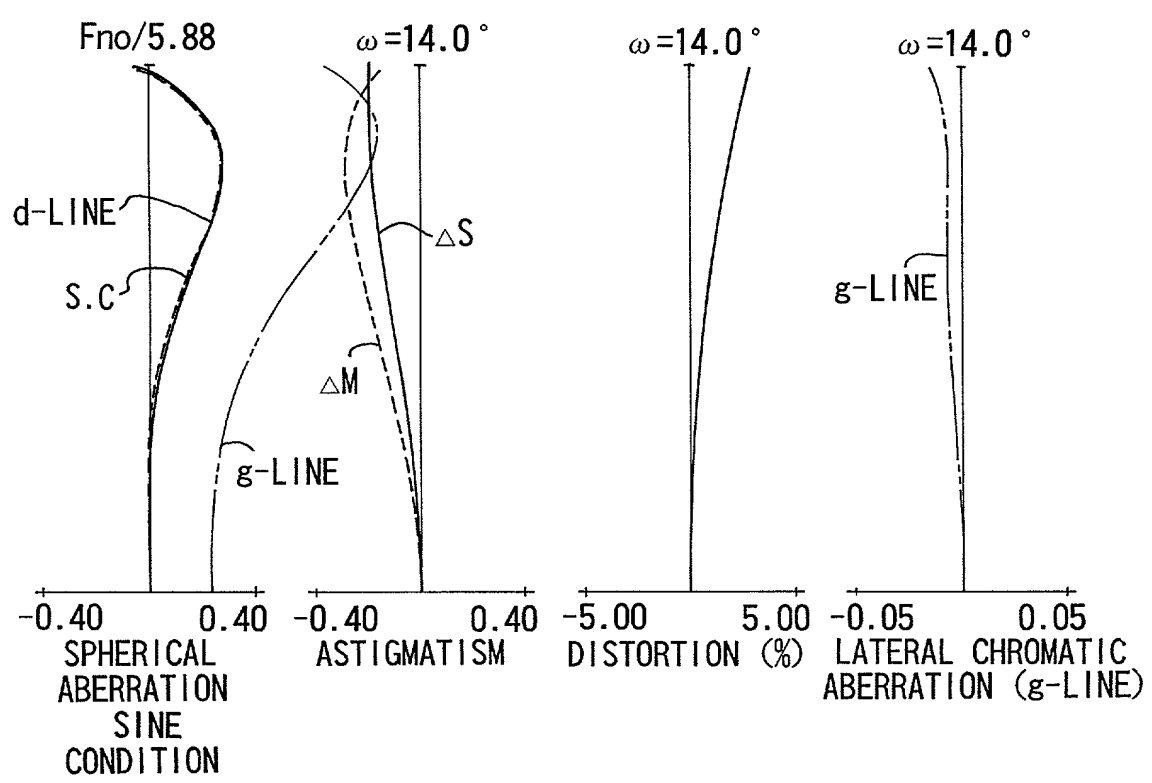


FIG. 13

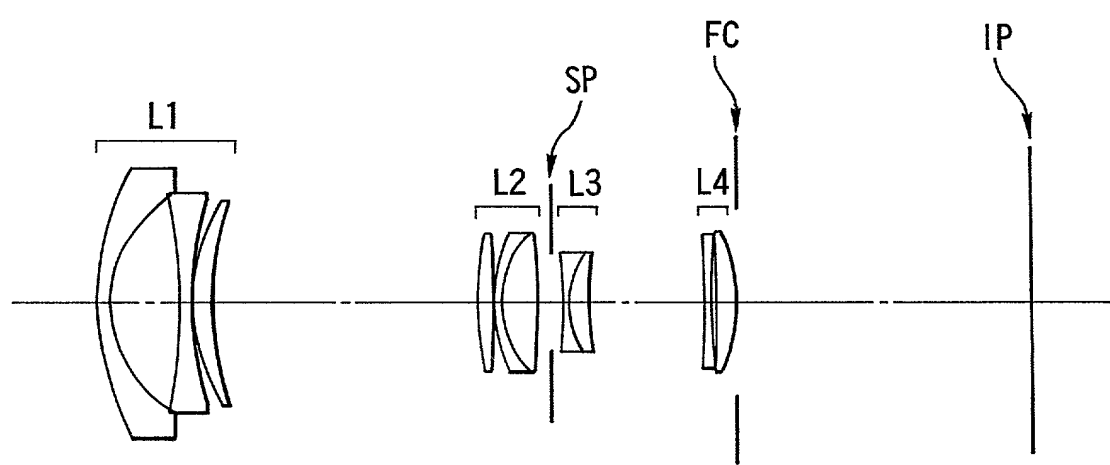


FIG. 14A FIG. 14B FIG. 14C FIG. 14D


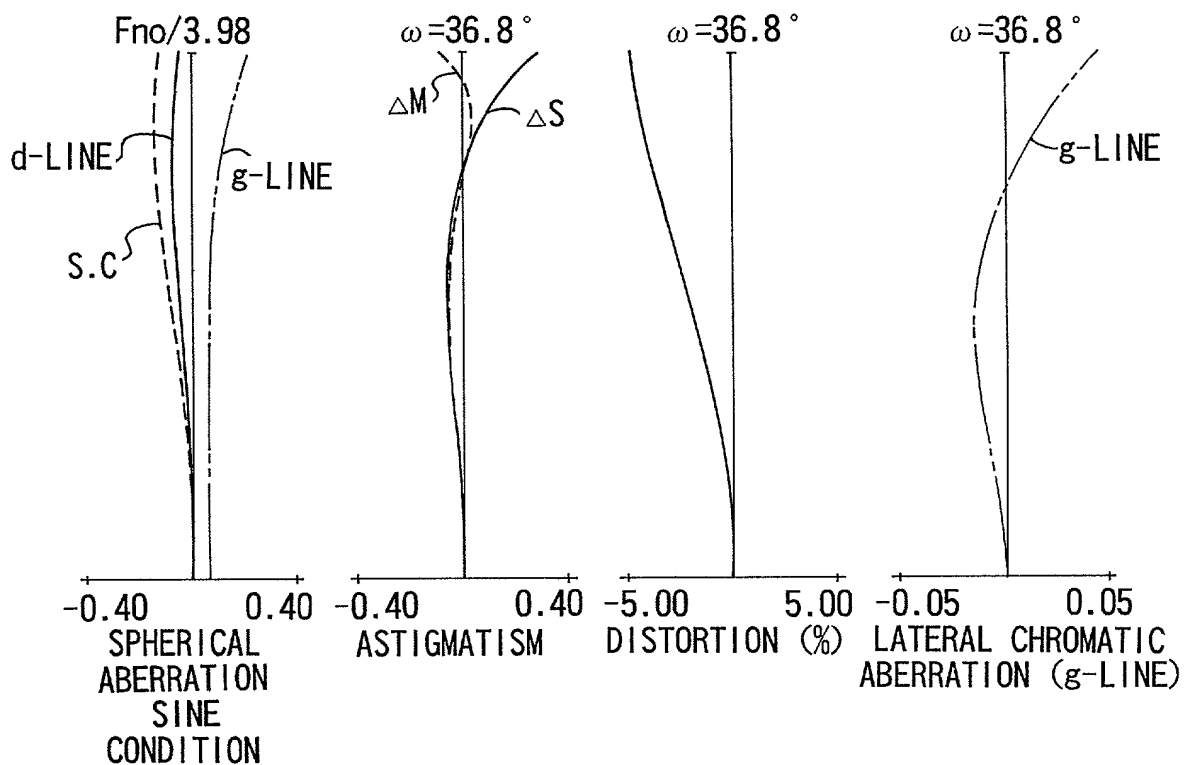


FIG. 15A FIG. 15B FIG. 15C FIG. 15D

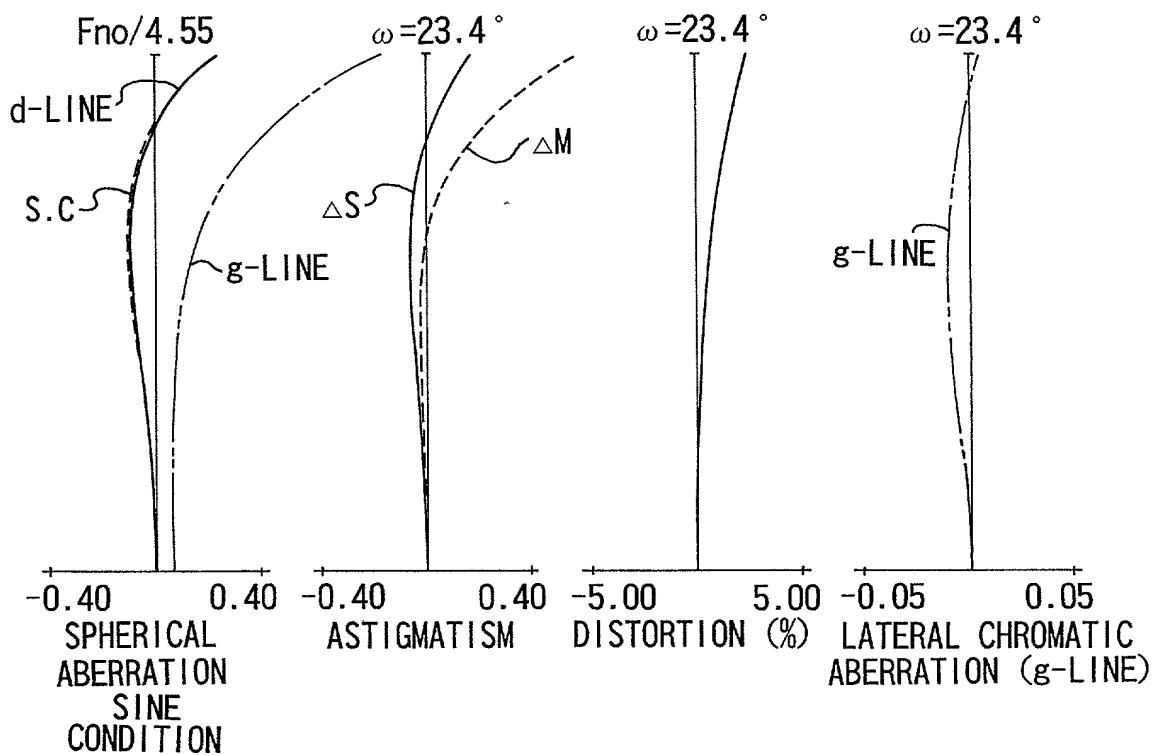

000000 46294650

FIG. 16A FIG. 16B FIG. 16C FIG. 16D

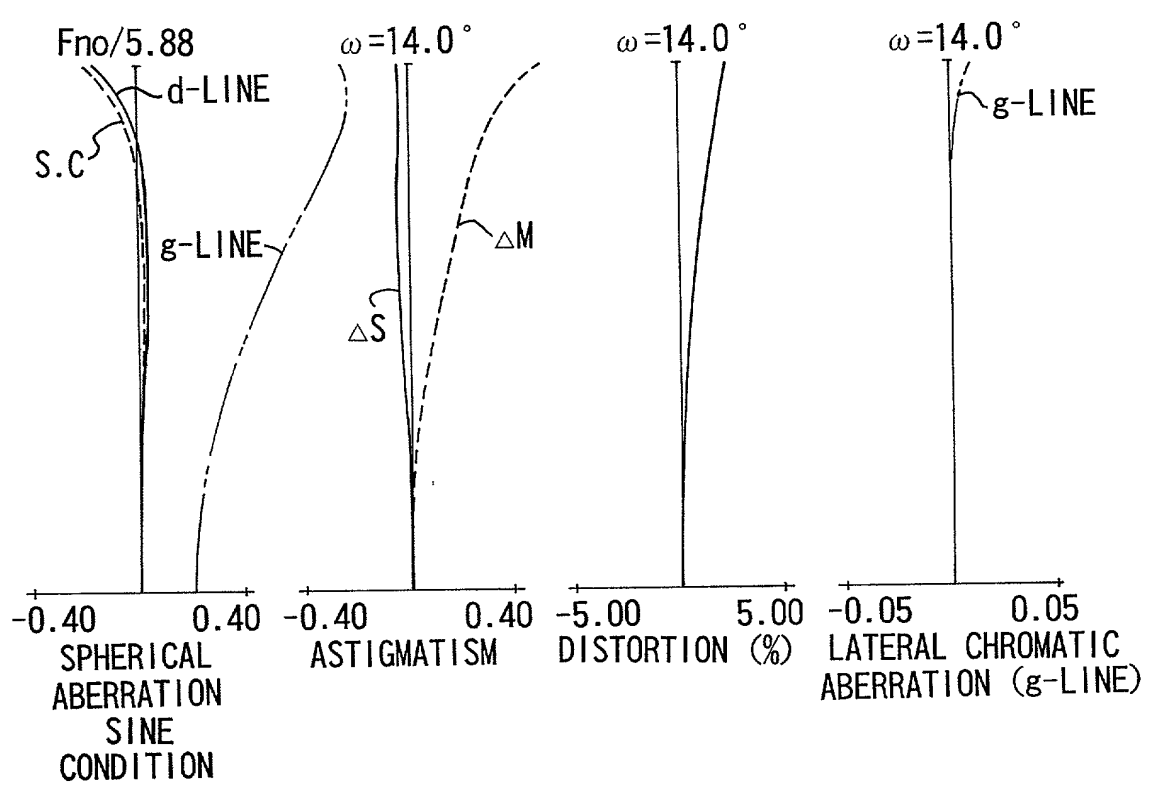


FIG. 17

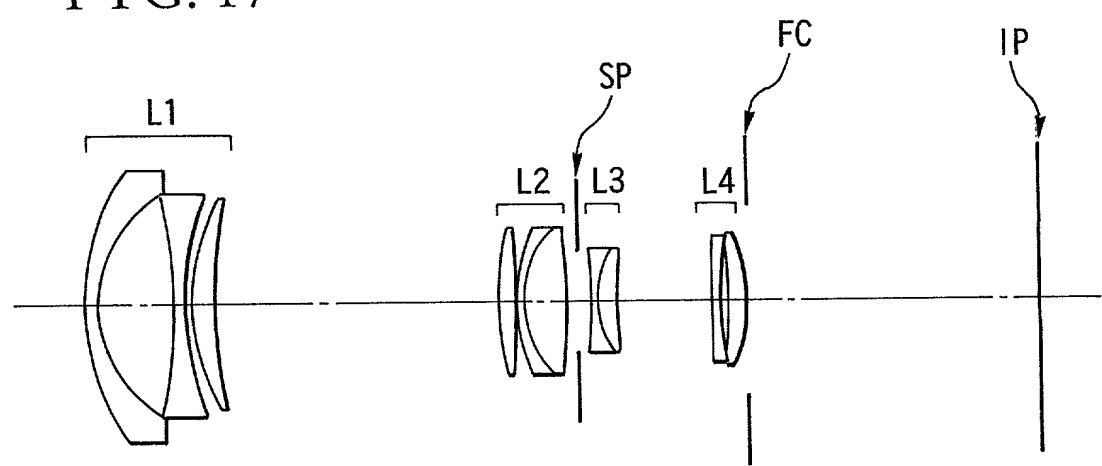


FIG. 18A FIG. 18B FIG. 18C FIG. 18D

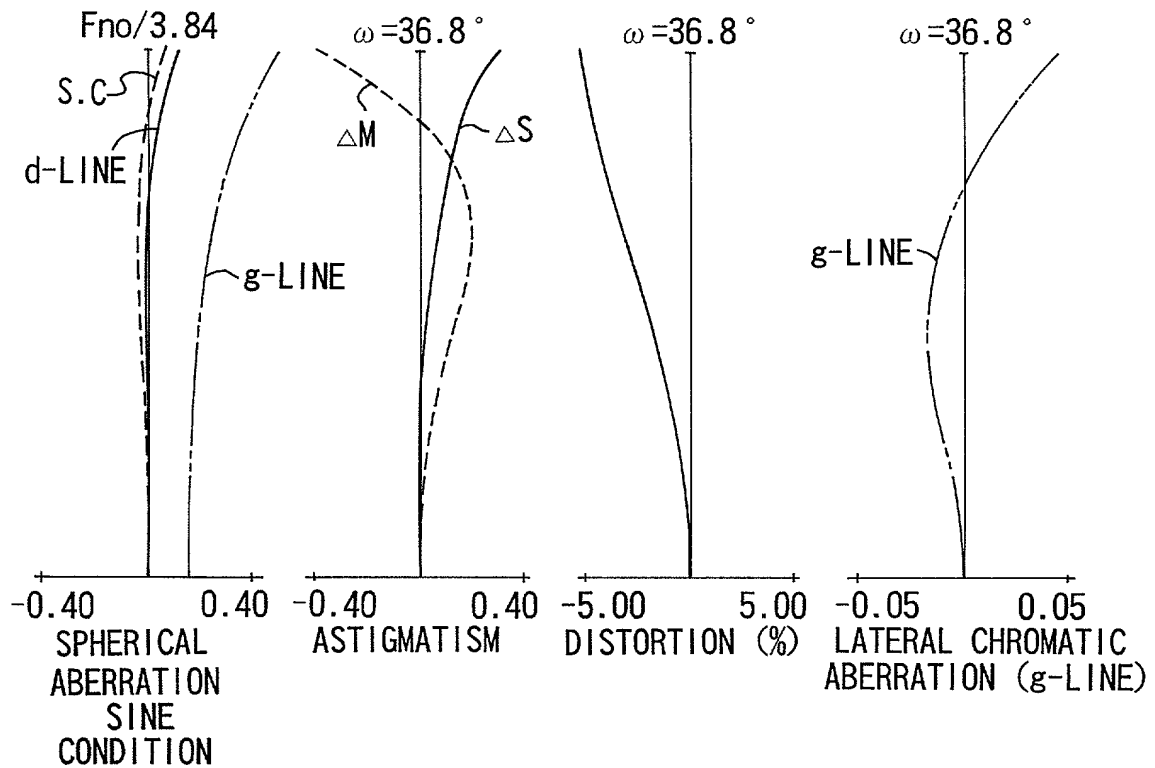


FIG. 19A FIG. 19B FIG. 19C FIG. 19D

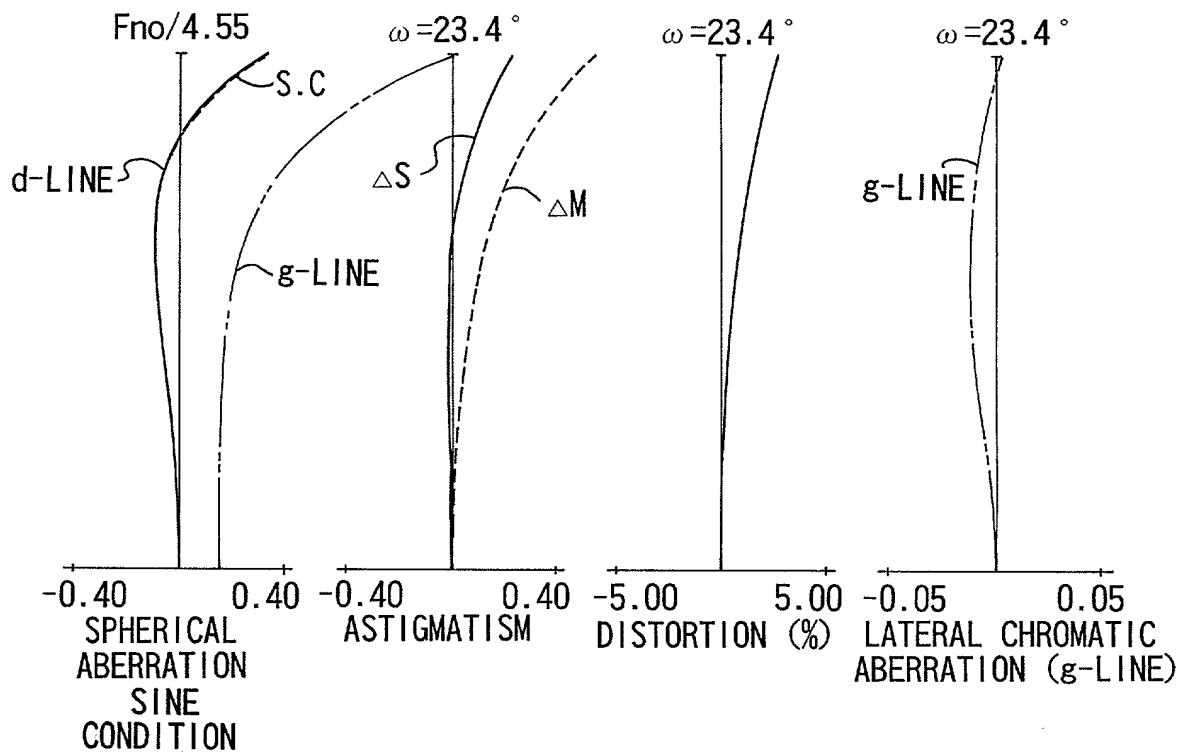


FIG. 20A FIG. 20B FIG. 20C FIG. 20D

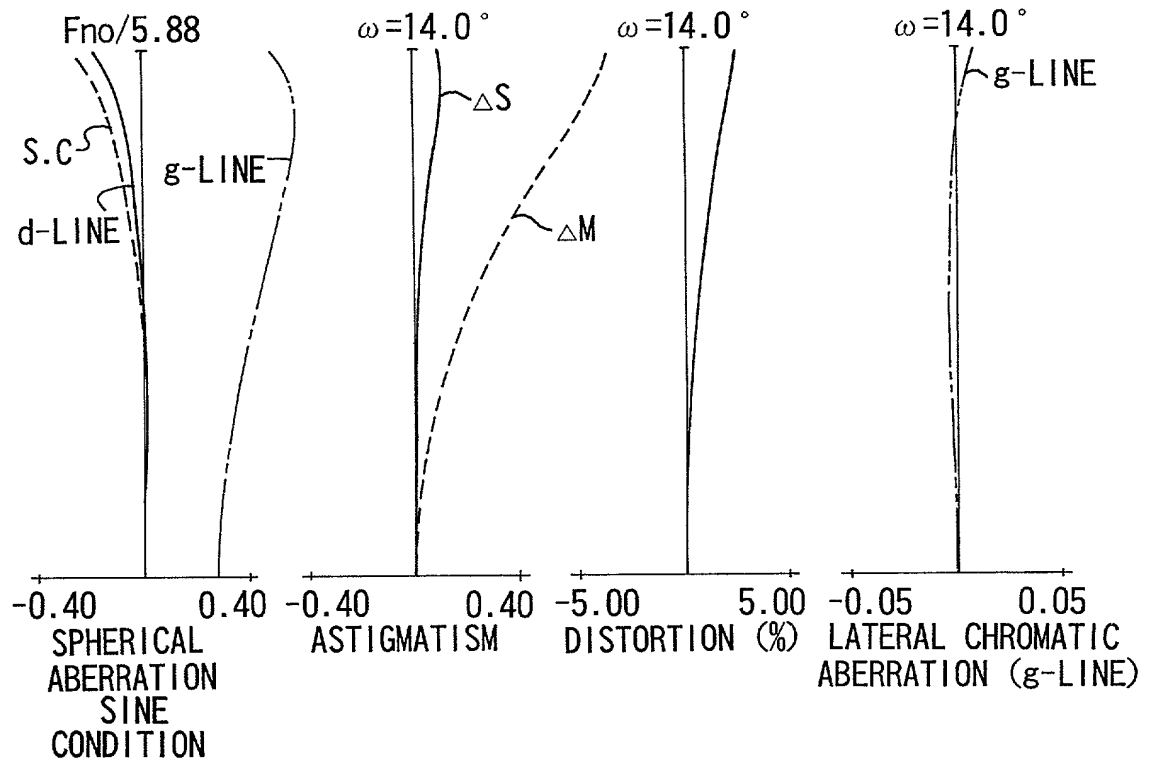


FIG. 21

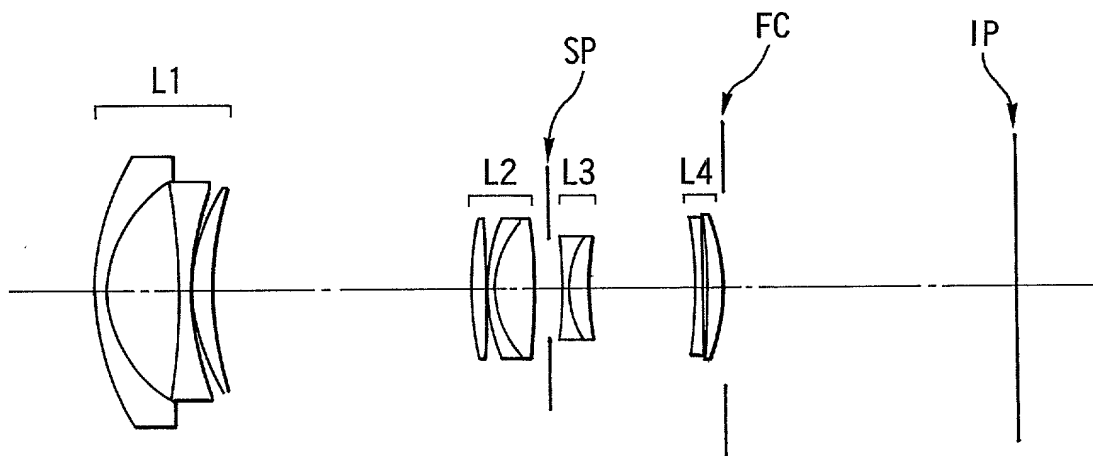


FIG. 22A FIG. 22B FIG. 22C FIG. 22D


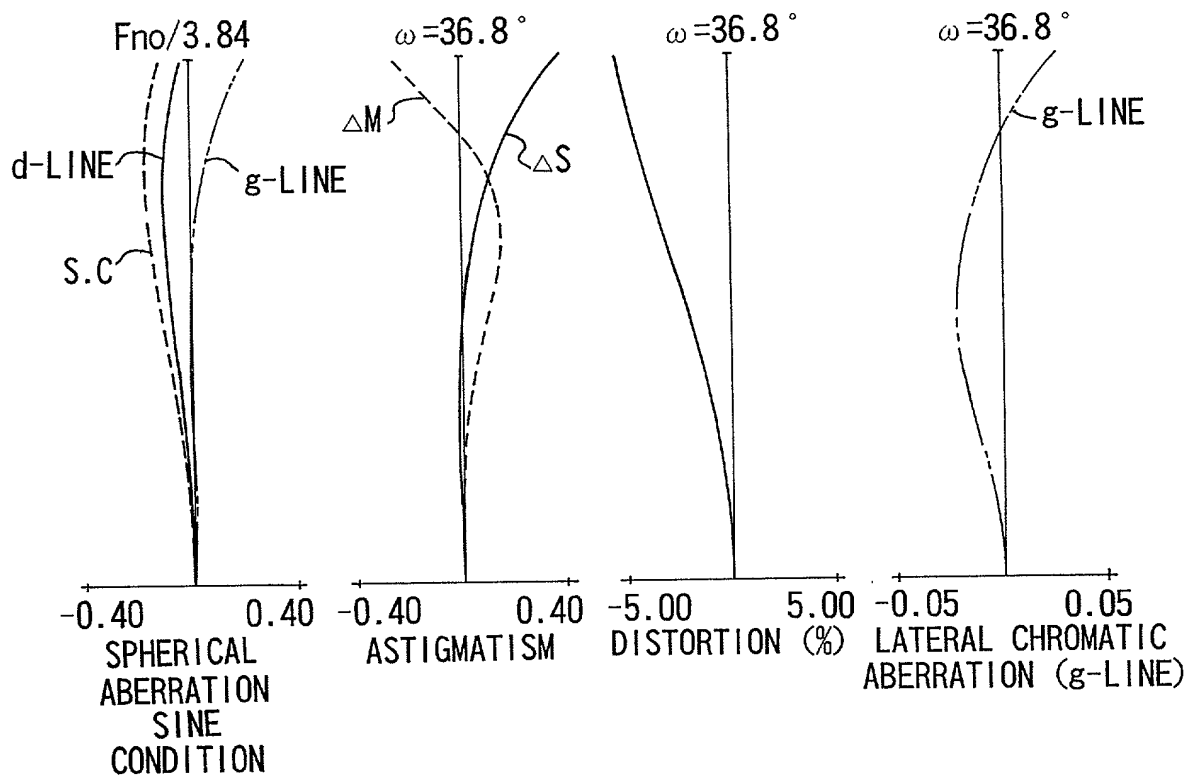


FIG. 23A FIG. 23B FIG. 23C FIG. 23D

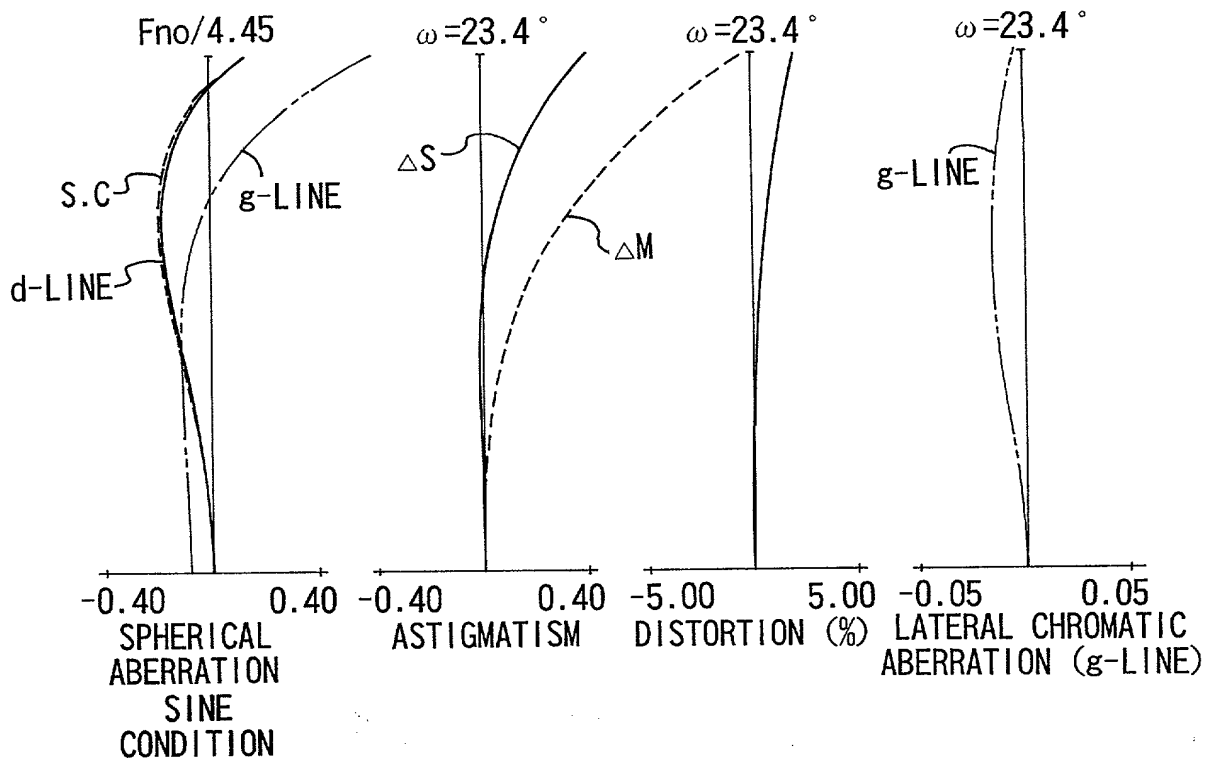

000000 46294660

FIG. 24A FIG. 24B FIG. 24C FIG. 24D

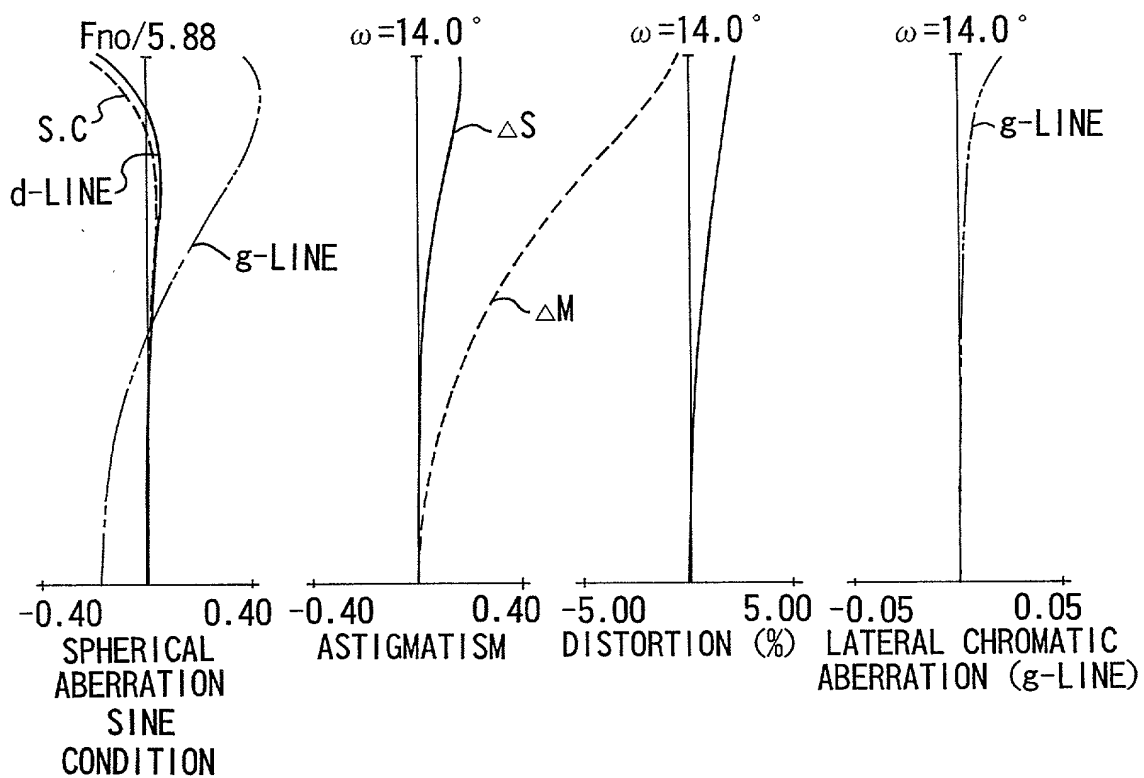


FIG. 25

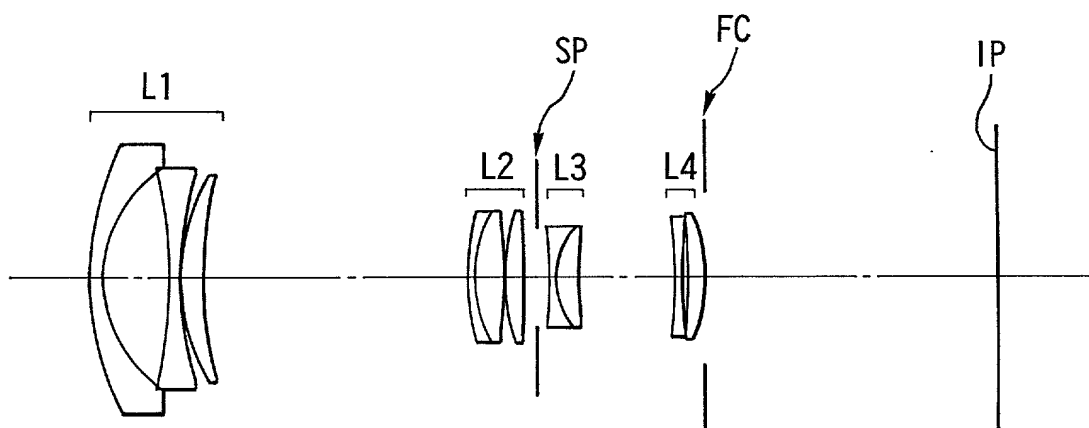


FIG. 26A FIG. 26B FIG. 26C FIG. 26D

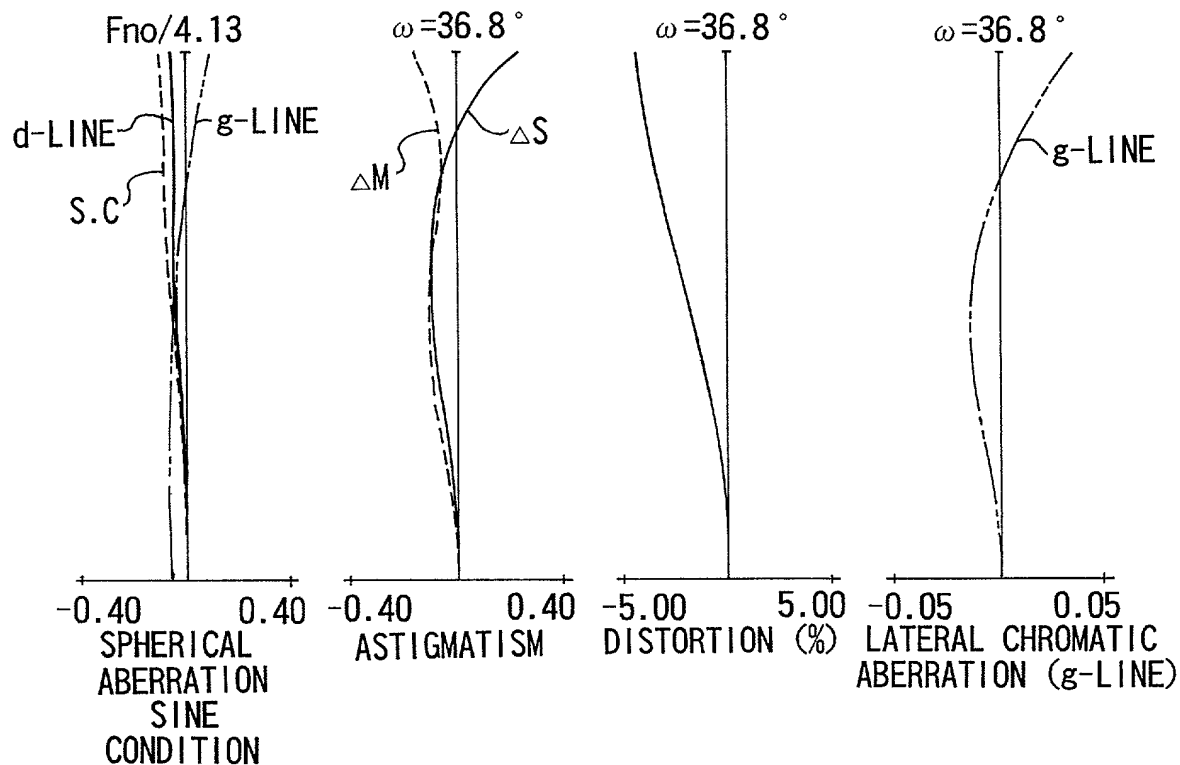


FIG. 27A FIG. 27B FIG. 27C FIG. 27D

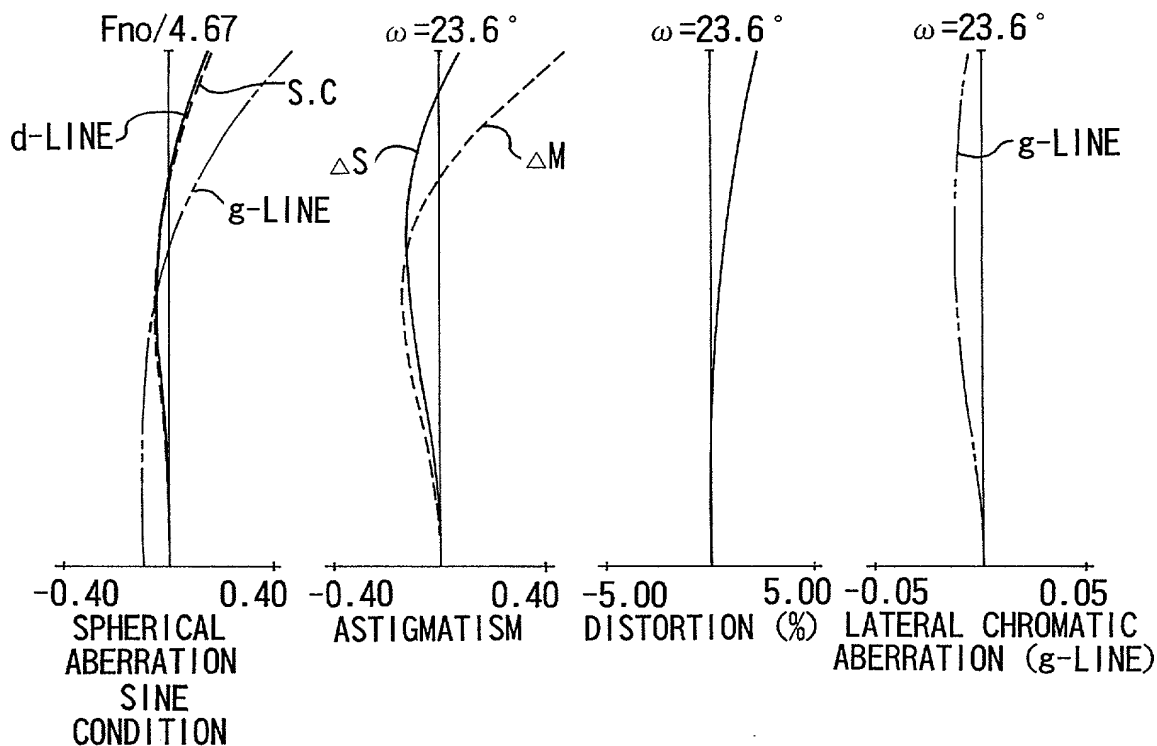


FIG. 28A FIG. 28B FIG. 28C FIG. 28D

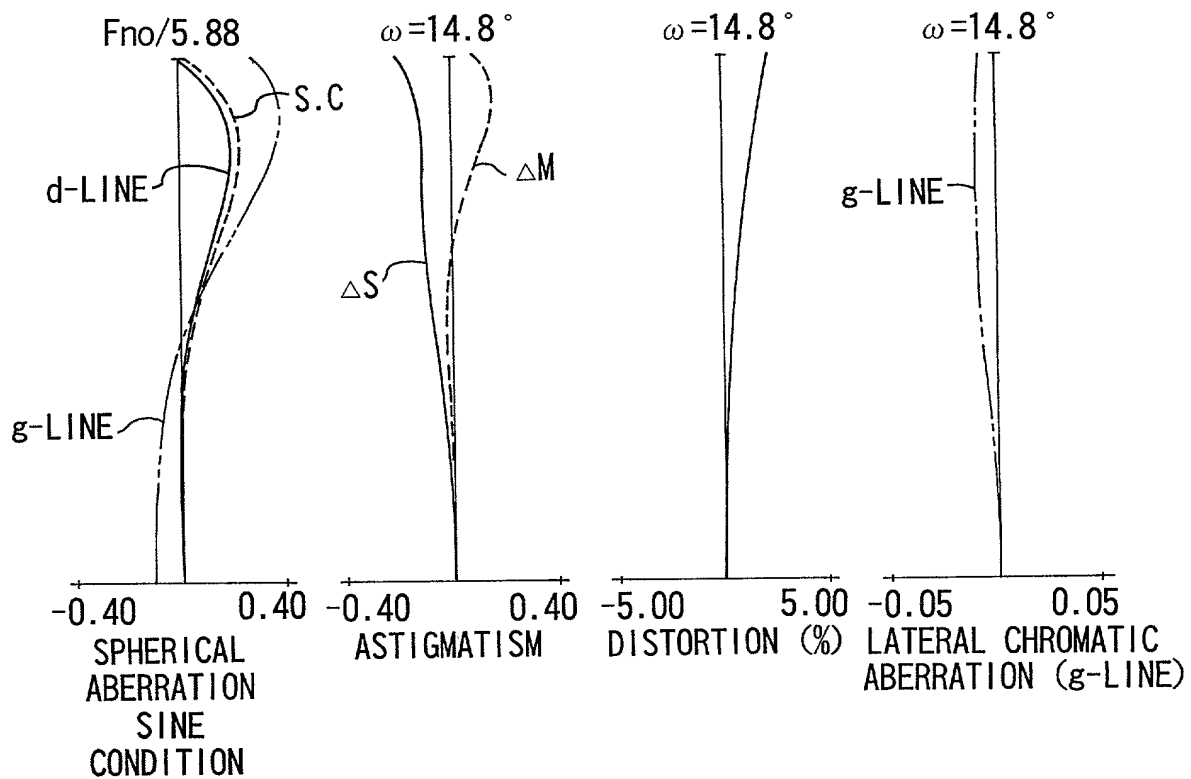


FIG. 29


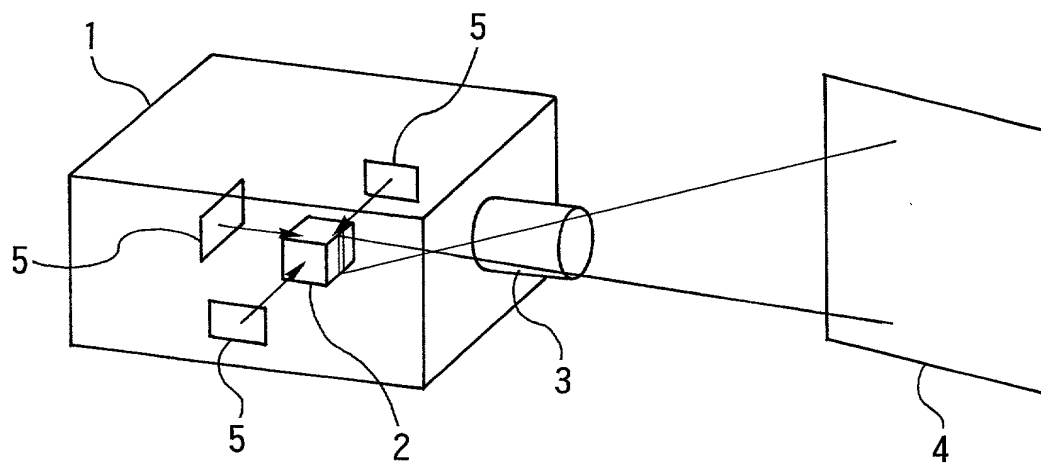


FIG. 30

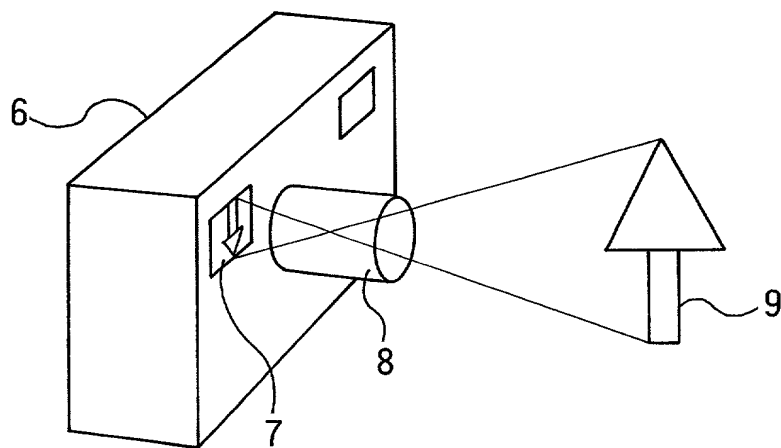

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ZOOM LENS, AND IMAGE PICKUP APPARATUS AND IMAGE PROJECTION APPARATUS USING THE
SAME the specification of which ☒ is attached hereto ☐ was filed on _____ as United States
Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	11-146229	26 MAY 1999	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Makoto MISAKA

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 2-3-5-303, Kajigaya, Takatsu-ku, Kawasaki-shi, Kanagawa-ken,
Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

GMJ/cmv